



# Pneumatic Linear Drives OSP-L

ORIGA SYSTEM PLUS

aerospace  
climate control  
electromechanical  
filtration  
fluid & gas handling  
hydraulics  
**pneumatics**  
process control  
sealing & shielding



ENGINEERING YOUR SUCCESS.



# Contents Linear Drives



<b>Origa System Plus</b>	<b>Page</b>
Introduction - OSP Concept	2
Modular Components Overview	3
Control Examples for OSP-L	4
OSP-L Application examples	5
<b>Rodless Pneumatic Cylinders</b>	
Overview	7
Series OSP-L Ø 25 to 63 mm	11
Integrated Valves VOE	17
Order instructions	19
<b>Linear Guides</b>	
Overview	21
Plain Bearing Guide SLIDELINE	23
Recirculating Ball Bearing Guide STARLINE	27
Variable Stop VS	30
<b>OSP-L Accessories</b>	
Overview	35
Clevis Mounting	37
End Cap Mounting	38
Mid-Section Support	39
Mountings for Linear Drives fitted with OSP-L-Guides	40
Inversion Mounting	47
Adaptor Profile	48
T-Slot Profile	49
Connection Profile	50
Duplex Connection	51
Multiplex Connection	52
<b>Magnetic Switches</b>	
Magnetic Switches RS and ES	53
Cable Cover	56
Magnetic Switches RST and EST	57

# Introduction – OSP Concept

<p>Basic Linear Drive Standard Version</p> <ul style="list-style-type: none"> <li>● Series OSP-L</li> </ul>	
<p>Air Connection on the End-face or both at One End</p> <ul style="list-style-type: none"> <li>● Series OSP-L</li> </ul>	
<p>Integrated 3/2 Way Valves</p> <ul style="list-style-type: none"> <li>● Series OSP-L</li> </ul>	
<p>Clevis Mounting</p> <ul style="list-style-type: none"> <li>● Series OSP-L</li> </ul>	
<p>End Cap Mounting</p> <ul style="list-style-type: none"> <li>● Series OSP-L</li> </ul>	
<p>Mid-Section Support</p> <ul style="list-style-type: none"> <li>● Series OSP-L</li> </ul>	
<p>Inversion Mounting</p> <ul style="list-style-type: none"> <li>● Series OSP-L</li> </ul>	

<p>Duplex Connection</p> <ul style="list-style-type: none"> <li>● Series OSP-L</li> </ul>	
<p>Multiplex Connection</p> <ul style="list-style-type: none"> <li>● Series OSP-L</li> </ul>	
<p>Linear Guides – SLIDELINE</p> <ul style="list-style-type: none"> <li>● Series OSP-L</li> </ul>	
<p>Linear Guides – STARLINE</p> <ul style="list-style-type: none"> <li>● Series OSP-L</li> </ul>	
<p>Magnetic Switches</p> <ul style="list-style-type: none"> <li>● Series OSP-L</li> </ul>	
<p>Variable Stop VS</p> <ul style="list-style-type: none"> <li>● Series OSP-L with Linear Guide STL</li> </ul>	

Linear Drives	OSP-L25	OSP-L32	OSP-L40	OSP-L50	OSP-L63
Theoretical force at 6 bar [N]	295	483	754	in progress	in progress
Effective force at 6 bar [N]	250	420	640		
Max. Velocity v [m/s]	4	4	4		
Magnetic piston (three sides)	□	□	□		
Lubrication - Prelubricated	□	□	□		
Multiple air ports ( 4 x 90° )	□	□	□		
Both Air Connections at End-face	○	○	○		
Air Connection on the End-face	○	○	○		
Cushioning	□	□	□		
Cushioning length [mm]	17	20	27		
Stroke length [mm] ▲	1 - 6000	1 - 6000	1 - 6000		
Pressure range p <sub>max</sub> [bar]	8.0	8.0	8.0		
Temperature range [°C] *	-20 – + 80	-20 – + 80	-20 – + 80		
Stainless steel parts	○	○	○		
Clevis Mounting	○	○	○		
Duplex Connection / Multiplex Connection	○	○	○		
Tandem piston	○	○	○		
<b>Basic Cylinder</b>					
F [N]	300	450	750		
Mx [Nm]	1.5	3	6		
My [Nm]	15	30	60		
Mz [Nm]	3	5	8		
<b>Slideline</b>					
F [N]	675	925	1500		
Mx [Nm]	14	29	50		
My [Nm]	34	60	110		
Mz [Nm]	34	60	110		
<b>Starline</b>					
F [N]	3100	3100	4000 - 7500		
Mx [Nm]	50	62	150		
My [Nm]	110	160	400		
Mz [Nm]	110	160	400		
- variable Stop	○	○	○		
<b>Magnetic Switches</b>					
Standard Version	○	○	○		
T-Nut Version	○	○	○		
<b>Integrated valves 3/2 WV NO VOE</b>	○	○	○		
<b>Mountings</b>					
End Cap Mounting / Mid-Section Support	○	○	○		
Inversion Mounting	○	○	○		
Adaptor Profile / T-Nut Profile	○	○	○		

□ = Standard version


○ = Option

▲ = longer strokes on request

× = not applicable


\* = other temperature ranges on request

# CONTROL EXAMPLES FOR OSP-L

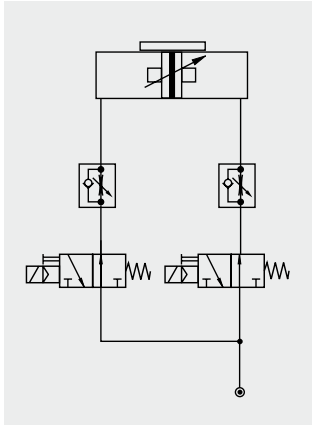


Circuit diagram for end of stroke application. Intermediate positioning is also possible.

The cylinder is controlled by two 3/2-way valves (normally open). The speed can be adjusted independently for both directions.

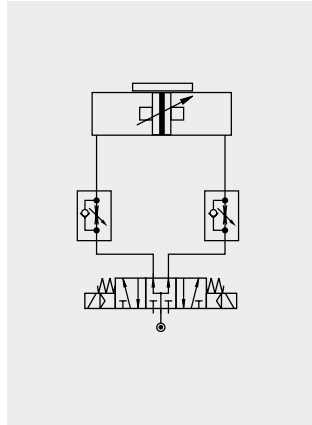

Circuit diagram for end of stroke application. Intermediate positioning is also possible.

The cylinder is controlled by a 5/3-way valve (middle position pressurized). The speed can be adjusted independently for both directions.

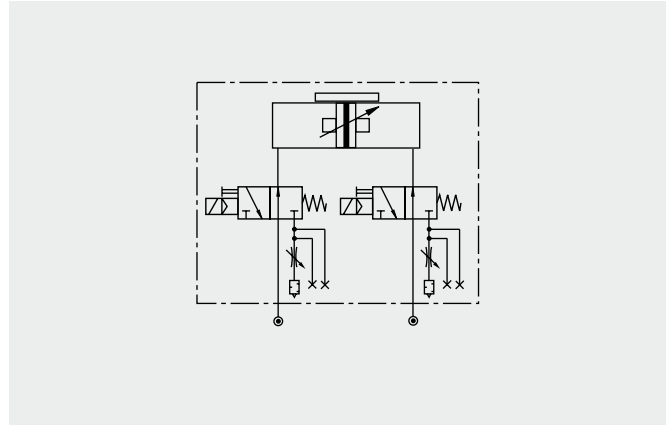


The optional integrated VOE Valves offer optimal control, and allow accurate


positioning of intermediate positions and the lowest possible speeds.

# OSP-L APPLICATION EXAMPLES

ORIGA SYSTEM PLUS – rodless linear drives offer maximum flexibility for any application.

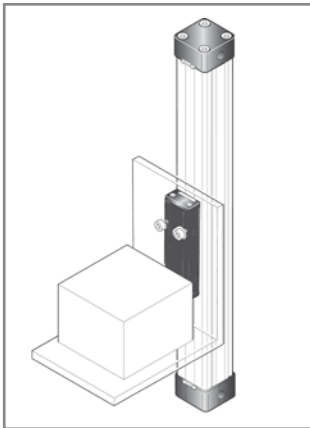


The high load capacity of the piston can cope with high bending moments without additional guides.

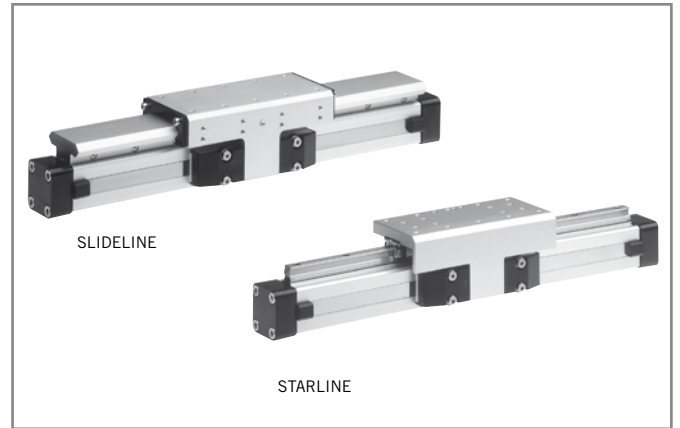



Integrated guides offer optimal guidance for applications requiring high performance, easy assembly and maintenance free operation.

Optimal system performance by combining multi-axis cylinder combinations.

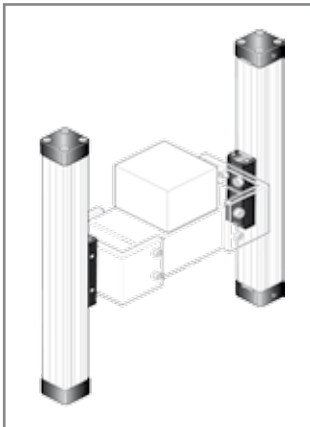

The mechanical design of the OSP-L allows synchronised movement of two cylinders.

When using external guides, the clevis mounting is used to compensate for deviations in parallelism.

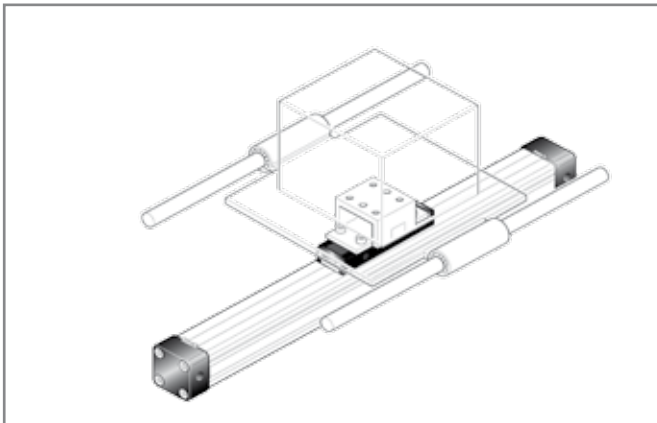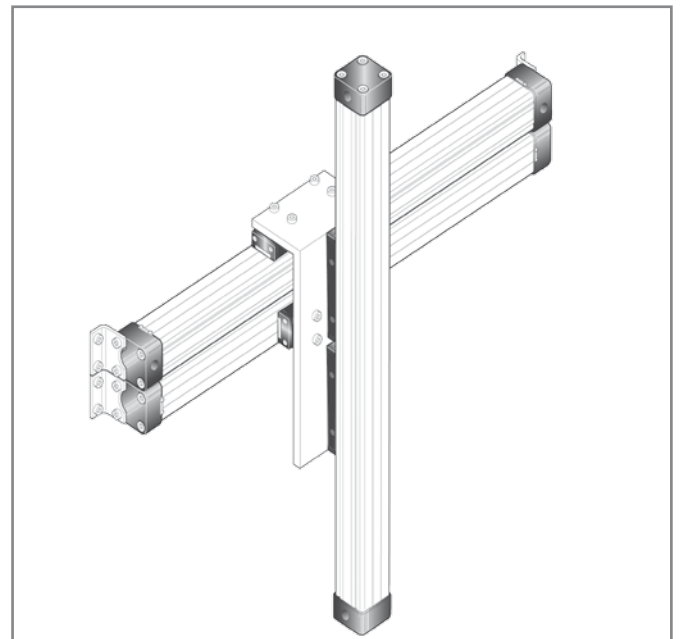


The right to introduce technical modifications is reserved

For further information and assembly instructions, please contact your local Parker Origa dealer.





# Rodless Pneumatic Cylinders Series OSP-L

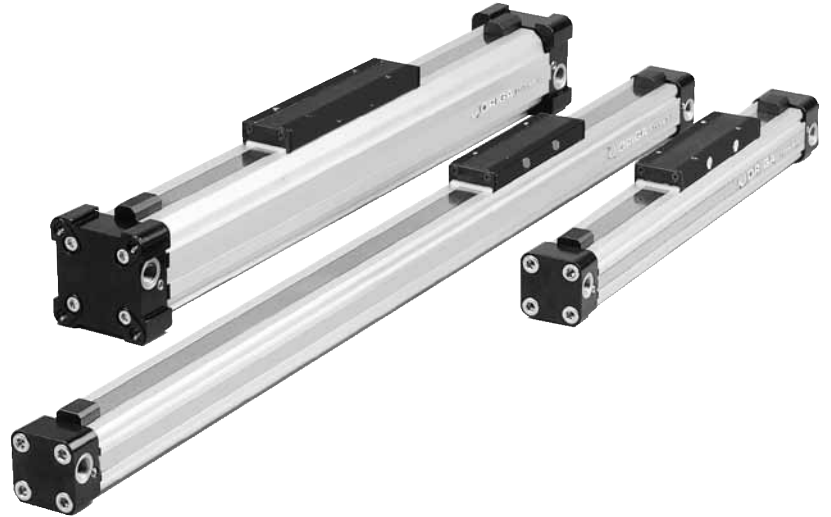

## Contents Standard Cylinders

Description	Page
The System Concept and Components	8
Technical Data	11
Dimensions	14
Order Instructions	19

# ORIGA SYSTEM PLUS

## – INNOVATION FROM A PROVEN DESIGN


The newly developed product line OSP-L can be simply and neatly integrated into any machine layout.


### MOUNTING RAILS ON 3 SIDES

Mounting rails on 3 sides of the cylinder enable modular components such as linear guides, valves, magnetic switches etc. to be fitted to the cylinder itself.

This solves many installation problems, especially where space is limited.

The modular system concept forms an ideal basis for additional customer-specific functions.

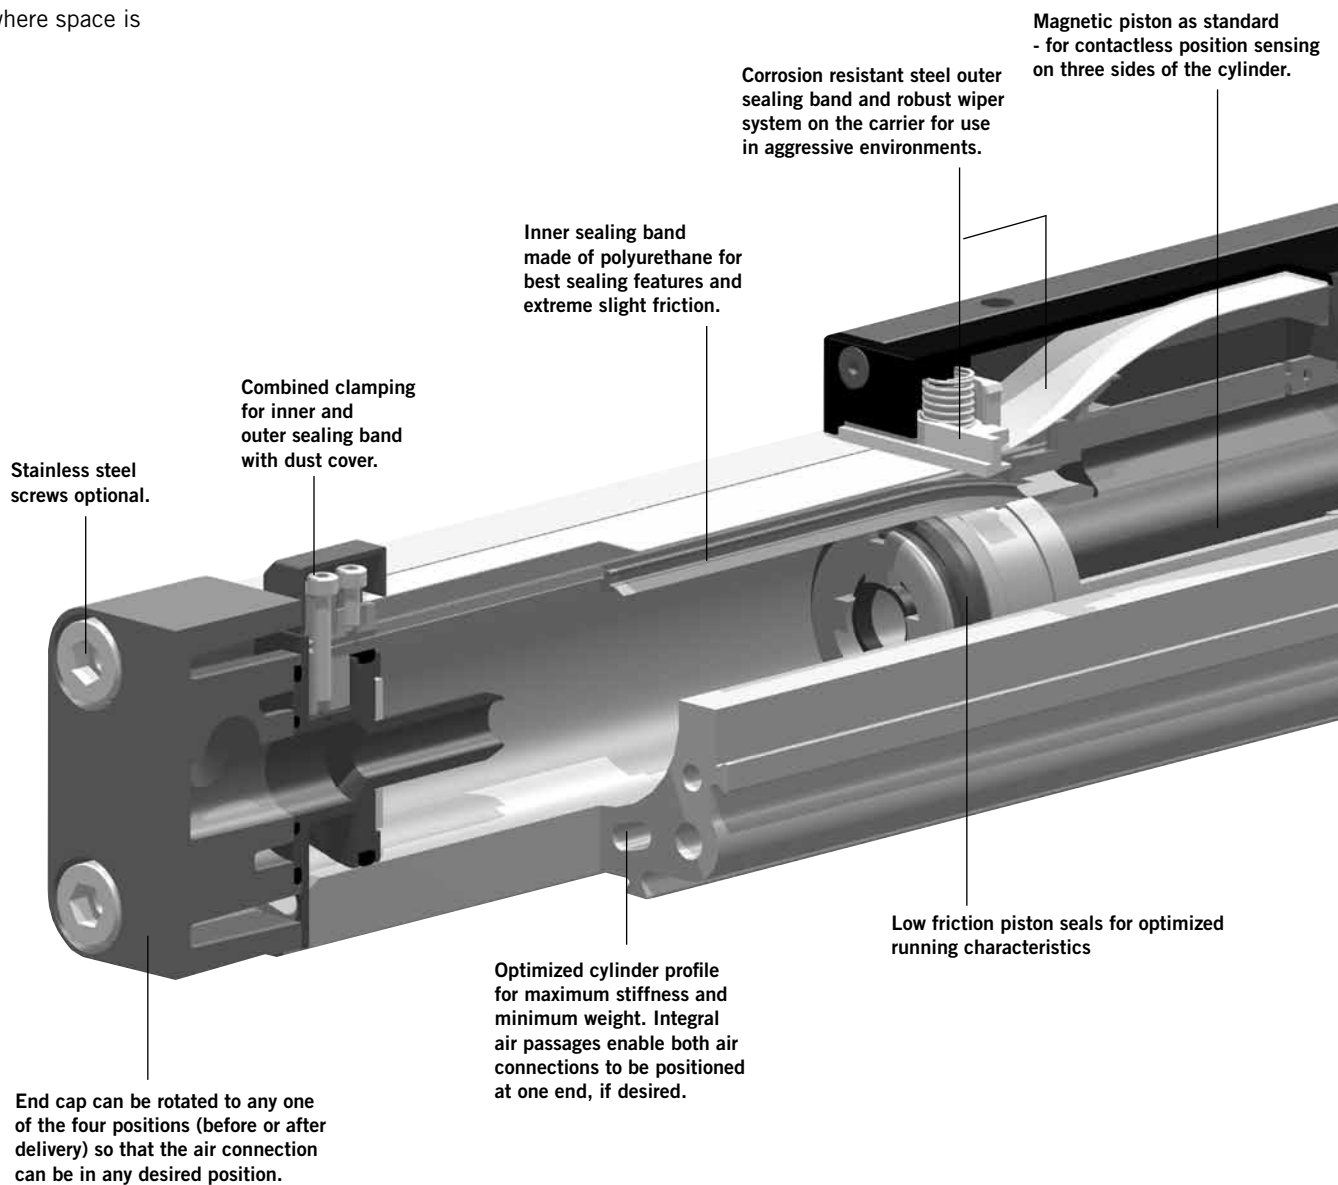

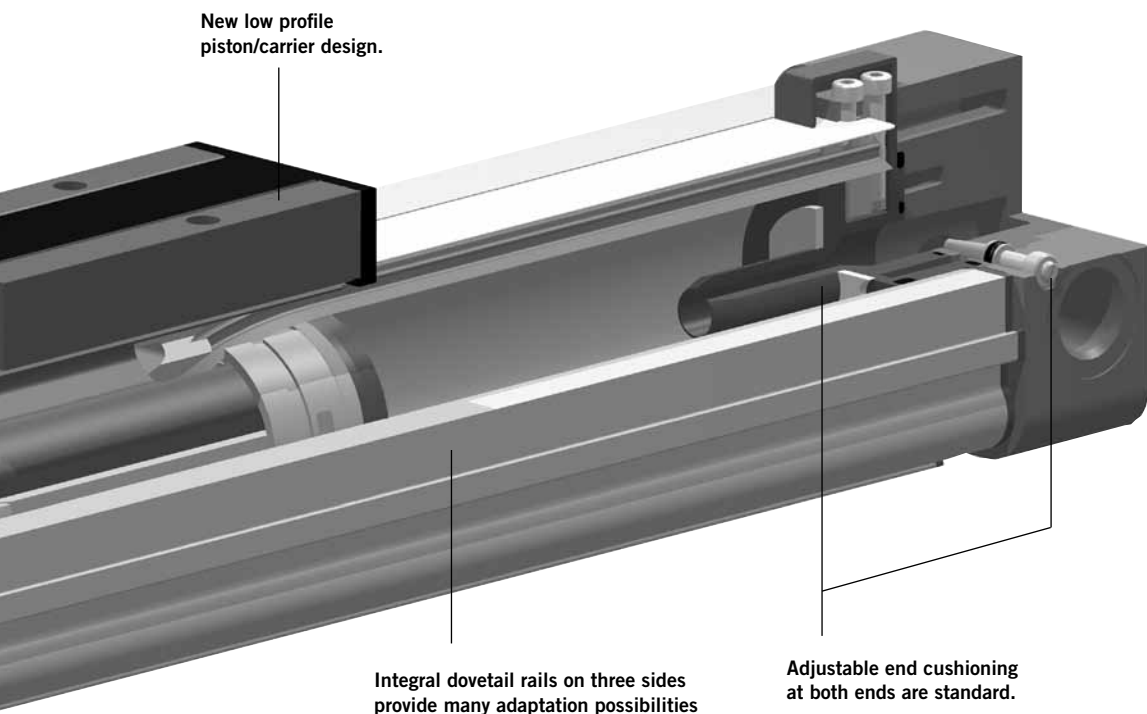


New low profile piston/carrier design.

Integral dovetail rails on three sides provide many adaptation possibilities (linear guides, magnetic switches, etc.).

Adjustable end cushioning at both ends are standard.

Modular system components are simply clamped on.

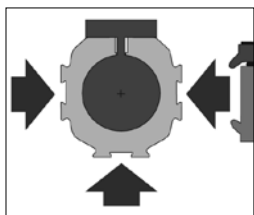


**SLIDELINE**  
Cost-effective plain bearing guide for medium loads.




**STARLINE**  
Recirculating ball bearing guide for very high loads and precision.



**VARIABLE STOP VS**  
The variable stop provides simple stroke limitation.



**INTEGRATED VOE VALVES**  
The complete compact solution for optimal cylinder control.



Install the OSP-L System to simplify design work! The files are compatible with all popular CAD systems and package hardware.




# OPTIONS AND ACCESSORIES FOR SYSTEM VERSATILITY

## SERIES OSP-L

### STANDARD VERSIONS OSP-L25 to L63

Standard carrier with integral guidance. End cap can be rotated 4 x 90° to position air connection on any side.  
Magnetic piston as standard.  
Dovetail profile for mounting of accessories and the cylinder itself.

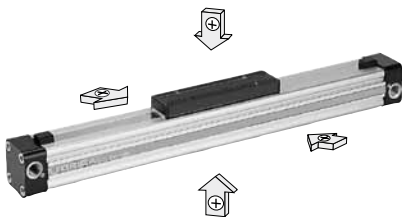

### BASIC CYLINDER OPTIONS

**STAINLESS VERSION**  
For use in constantly damp or wet environments. All screws are A2 quality stainless steel (material no.1.4301 / 1.4303)



### END-FACE AIR CONNECTION

To solve special installation problems.



### BOTH AIR CONNECTIONS AT ONE END

For simplified tubing connections and space saving.



### INTEGRATED VOE VALVES

The complete compact solution for optimal cylinder control.



### DUPLEX CONNECTION

The duplex connection combines two OSP-L cylinders of the same size into a compact unit with high performance.



### MULTIPLEX CONNECTION


The multiplex connection combines two or more OSP-L cylinders of the same size into one unit. The orientation of the carriers can be freely selected.



## ACCESSORIES

### MAGNETIC SWITCHES TYPE RS, ES, RST, EST


For electrical sensing of end and intermediate piston positions.

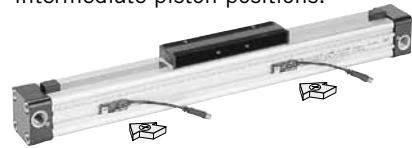

### MOUNTINGS FOR OSP-L25 TO L63

#### CLEVIS MOUNTING

Carrier with tolerance and parallelism compensation for driving loads supported by external linear guides.

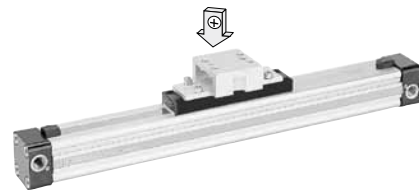

#### END CAP MOUNTING

For end-mounting of the cylinder.




#### MID-SECTION SUPPORT

For supporting long cylinders or mounting the cylinder by its dovetail rails.








#### INVERSION MOUNTING

The inversion mounting transfers the driving force to the opposite side, e. g. for dirty environments.

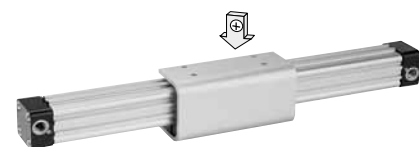

Characteristics		Pressures quoted as gauge pressure	
Characteristics	Symbol	Unit	Description
<b>General Features</b>			
Type			Rodless cylinder
Series			OSP-L
System			Double-acting, with cushioning, position sensing capability
Mounting			See drawings
Air Connection			Threaded
Ambient temperature range	T <sub>min</sub> T <sub>max</sub>	°C °C	-20 +80 Other temperature ranges on request
Weight (mass)		kg	See table below
Installation			In any position
Medium			Filtered, unlubricated compressed air (other media on request)
Lubrication			Permanent grease lubrication (additional oil mist lubrication not required)
Material	Cylinder Profile		Anodized aluminium
	Carrier (piston)		Anodized aluminium
	End caps		Aluminium, lacquered
	Sealing bands		Corrosion resistant steel (outerband) Polyurethane (inner band)
	Seals		Polyurethane, NBR
	Screws		Galvanized steel Option: stainless steel
	Dust covers, wipers		Plastic
Max. operating pressure	p <sub>max</sub>	bar	8

Weight (mass) kg		
Cylinder series (Basic cylinder)	Weight (Mass) kg	
	At 0 mm stroke	per 100 mm stroke
OSP-L25	0.65	0.197
OSP-L32	1.44	0.354
OSP-L40	1.95	0.415
OSP-L50	in progress	
OSP-L63	in progress	


Size Comparison				
L25	L32	L40	L50	L63
				

# Rodless Pneumatic Cylinder

∅ 25-63 mm



Series OSP-L..



### Standard Versions:

- Double-acting with adjustable end cushioning
- With magnetic piston for position sensing

### Special Versions:

- Stainless steel screws
- Both air connections on one end
- Air connection on the end-face
- Integrated Valves VOE



- End cap can be rotated 4 x 90° to position air connection as desired
- Free choice of stroke length up to 6000 mm


## Loads, Forces and Moments

Choice of cylinder is decided by:

- Permissible loads, forces and moments.
- Performance of the pneumatic end cushions. The main factors here are the mass to be cushioned and the piston speed at start of cushioning (unless external cushioning is used, e. g. hydraulic shock absorbers).

The adjacent table shows the maximum values for light, shock-free operation, which must not be exceeded even in dynamic operation. **Load and moment data are based on speeds  $v \leq 0.5$  m/s.**

When working out the action force required, it is essential to take into account the friction forces generated by the specific application or load.

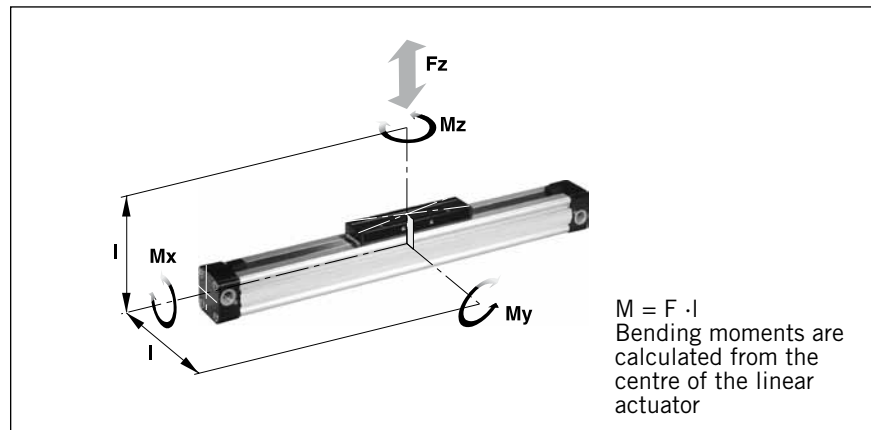


Cylinder-Series [mm Ø]	Theoretical Action Force at 6 bar [N]	effektive Action Force $F_A$ at 6 bar [N]	max. Moments			max. Load F [N]	Cushion Length [mm]
			Mx [Nm]	My [Nm]	Mz [Nm]		
<b>OSP-L25</b>	295	250	1.5	15	3	300	17
<b>OSP-L32</b>	483	420	3	30	5	450	20
<b>OSP-L40</b>	754	640	6	60	8	750	27
<b>OSP-L50</b>	in progress						
<b>OSP-L63</b>	in progress						


## Cushioning Diagram

Work out your expected moving mass and read off the maximum permissible speed at start of cushioning. Alternatively, take your desired speed and expected mass and find the cylinder size required.


Please note that piston speed at start of cushioning is typically ca. 50 % higher than the average speed, and that it is this higher speed which determines the choice of cylinder. If these maximum permissible values are exceeded, additional shock absorbers must be used.

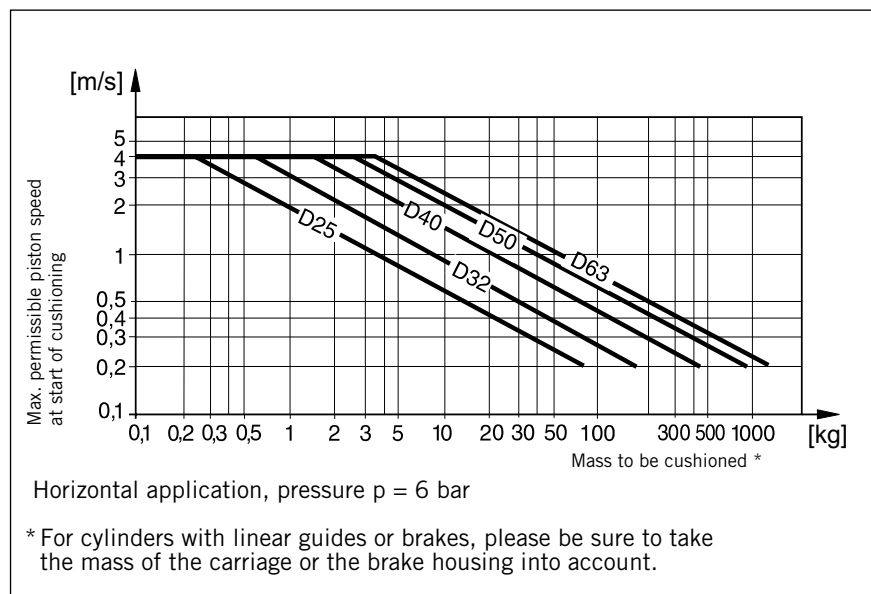

**Permissible Support Spacings: OSP - L25 to L32**

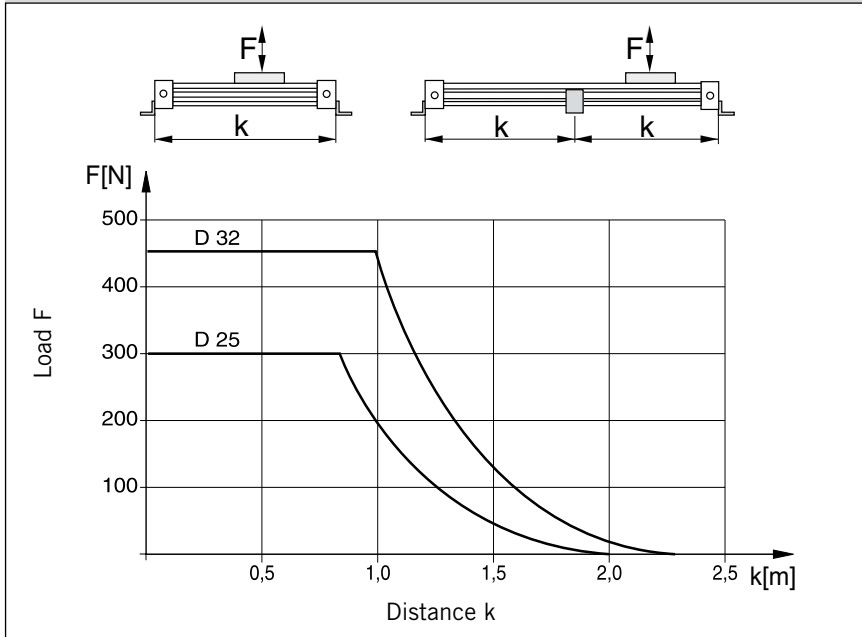

**Permissible Support Spacings: OSP - L40 to L63**

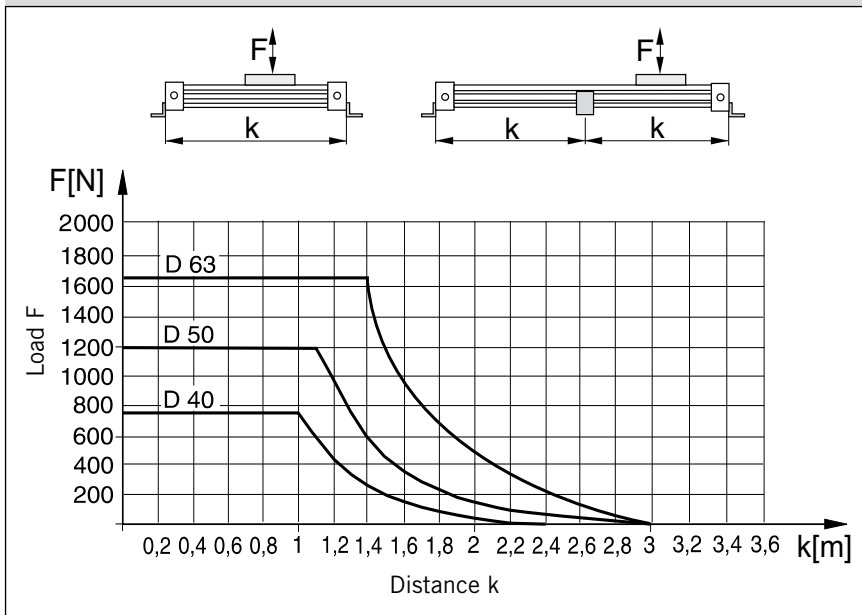

**Mid-Section Supports**

To avoid excessive bending and oscillation of the cylinder, mid-section supports are required dependent on specified stroke lengths and applied loads. The diagrams show the maximum possible support spacings depending on the load.


Bending up to max. 0.5 mm is permissible between supports.

The mid-section supports are clamped on to the dovetail profile of the cylinder tube. They are also able to take the axial forces.

## Cylinder Stroke and Dead Length A

- Free choice of stroke length up to 6000 mm in 1 mm steps.
- Longer strokes on request.


### Dimensions of Basic Cylinder OSP - L25 to L63

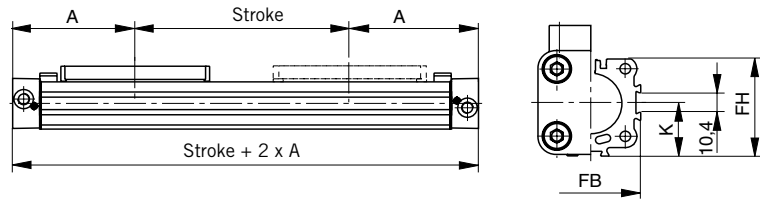

## Tandem Cylinder

Two pistons are fitted: dimension "Z" is optional. (Please note minimum distance "Z<sub>min</sub>").

- Free choice of stroke length up to 6000 mm in 1 mm steps
- Longer strokes on request
- Stroke length to order is stroke + dimension "Z"

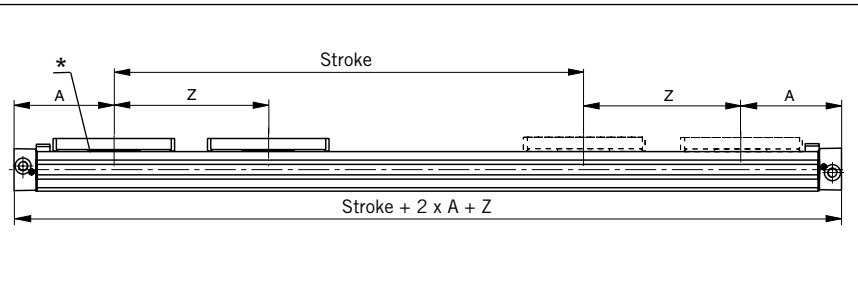


Please note:

To avoid multiple actuation of magnetic switches, the second piston is not equipped with magnets.


\* Piston with magnet

### End Cap/Air Connection can be rotated 4 x 90°

### Series OSP -L25 to L32

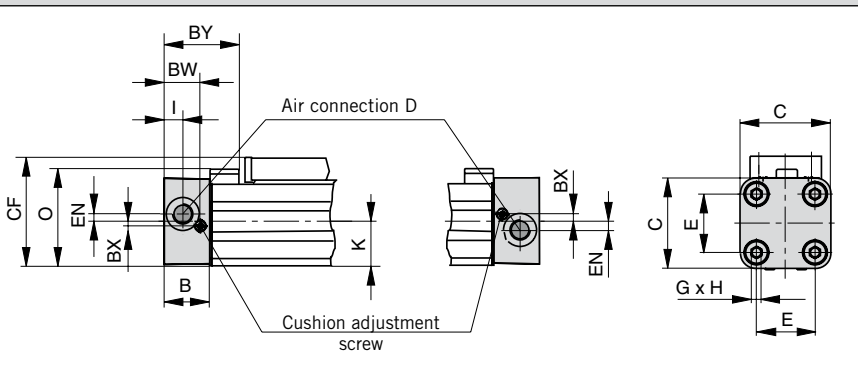


### Carrier Series OSP-L25 to L63

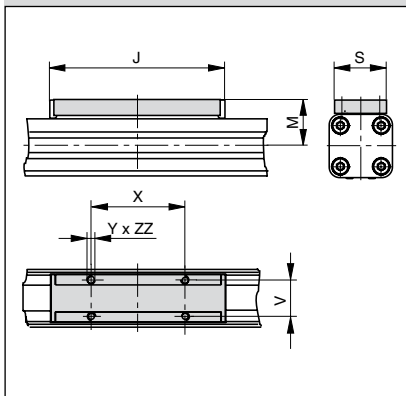

### End Cap/Air Connection can be rotated 4 x 90°

### Series OSP -L40 to L63

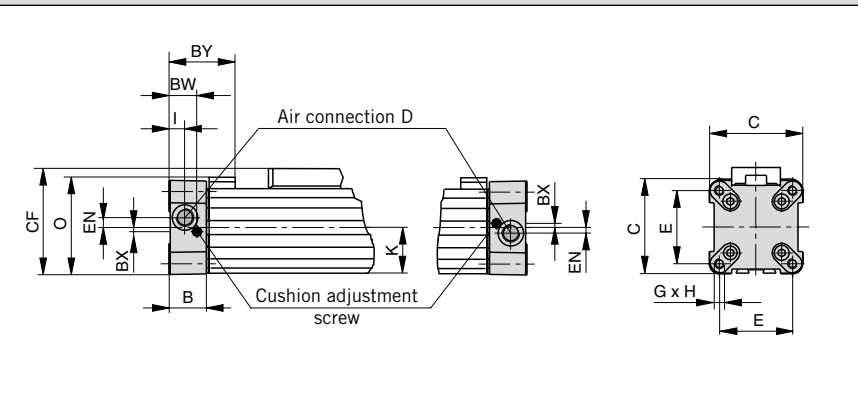


### Dimension Table (mm)

Cylinder Series	A	B	C	D	E	G	H	I	J	K	M	O	S	V	X	Y	Z <sub>min</sub>	BW	BX	BY	CF	EN	FB	FH	ZZ
OSP-L25	100	22	41	G1/8	27	M5	15	9	117	21.5	31	47	33	25	65	M5	128	17.5	2.2	40	52.5	3.6	40	39.5	8
OSP-L32	125	25.5	52	G1/4	36	M6	15	11.5	152	28.5	38	59	36	27	90	M6	170	20.5	2.5	44	66.5	5.5	52	51.7	10
OSP-L40	150	28	69	G1/4	54	M6	15	12	152	34	44	72	36	27	90	M6	212	21	3	54	78.5	7.5	62	63	10
OSP-L50	in progress																								
OSP-L63	in progress																								



**Series OSP-L25 to L32**

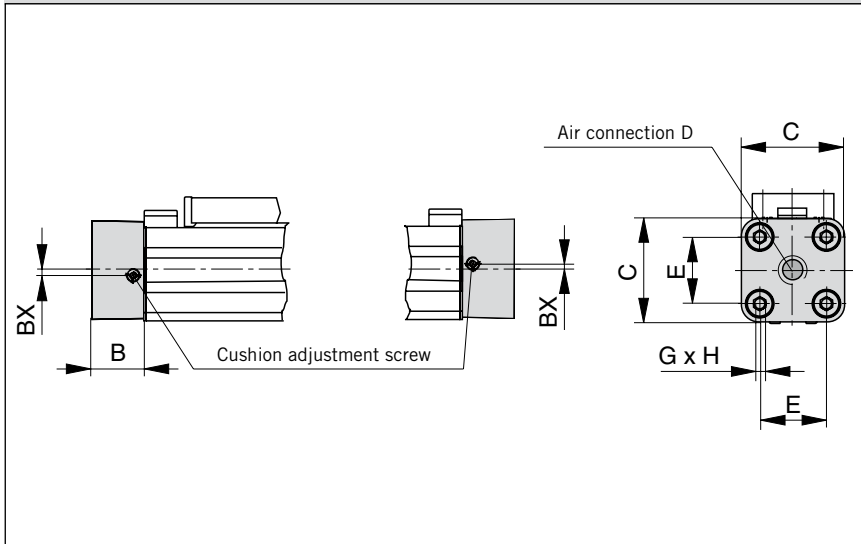


**Air Connection on the End-face**

In some situations it is necessary or desirable to fit a special end cap with the air connection on the end-face instead of the standard end cap with the air connection on the side. The special end cap can also be rotated 4 x 90° to locate the cushion adjustment screw as desired. Supplied in pairs.



**Series OSP-L40 to L63**

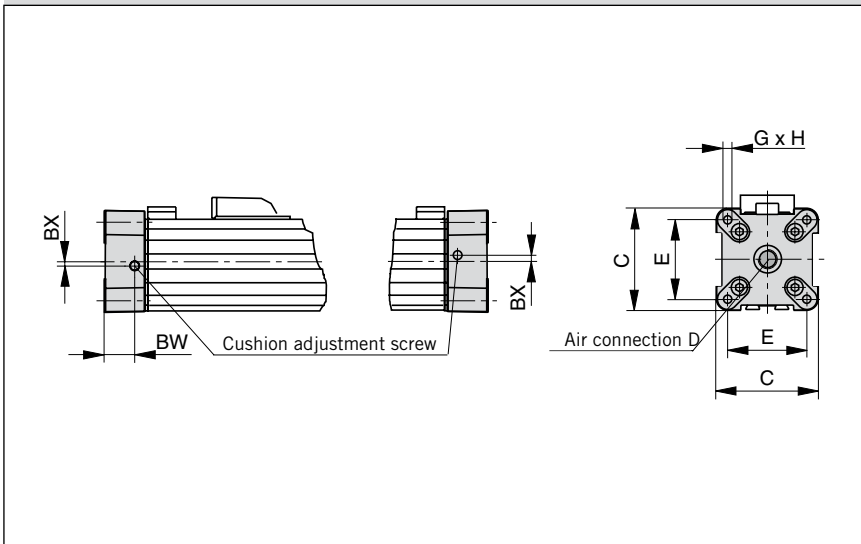


Dimension Table (mm)								
Cylinder Series	B	C	D	E	G	H	BX	BW
OSP-L25	22	41	G1/8	27	M5	15	2.2	17.5
OSP-L32	25.5	52	G1/4	36	M6	15	2.5	20.5
OSP-L40	28	69	G1/4	54	M6	15	3	21
OSP-L50	in progress							
OSP-L63	in progress							

## Both Air Connections at One End

A special end cap with both air connections on one side is available for situations where shortage of space, simplicity of installation or the nature of the process make it desirable. Air supply to the other end is via internal air passages (OSP-L25 to L63).




### Series OSP-L25

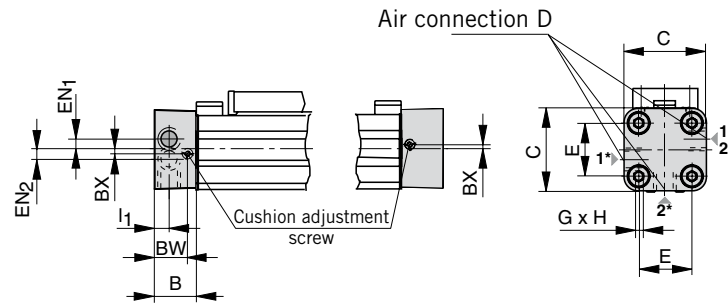

\* Versions of Air Connection Positions: 1 → 1 or 2 → 2


### Series OSP-L32 to L63

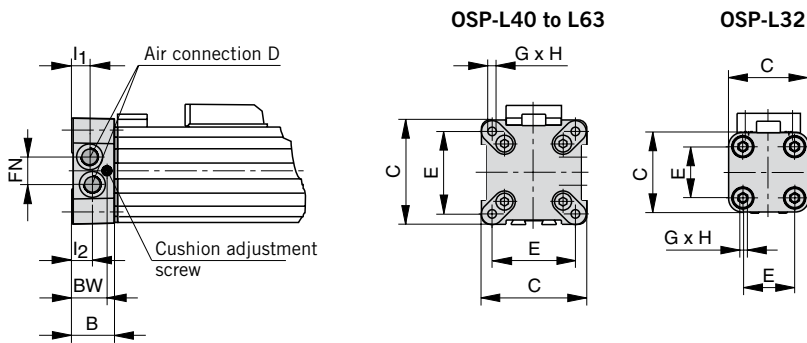

Dimension Table (mm)

Cylinder Series	B	C	D	E	G	H	I <sub>1</sub>	I <sub>2</sub>	BX	BW	EN <sub>1</sub>	EN <sub>2</sub>	FN
OSP-L25	22	41	G1/8	27	M5	15	9	-	2.2	17.5	3.6	3.9	-
OSP-L32	25.5	52	G1/8	36	M6	15	12.2	10.5	-	20.5	-	-	15.2
OSP-L40	28	69	G1/8	54	M6	15	12	12	-	21	-	-	17
OSP-L50	in progress												
OSP-L63	in progress												

## Integrated 3/2 Way Valves VOE Series OSP-L25, L32, L40 and L50

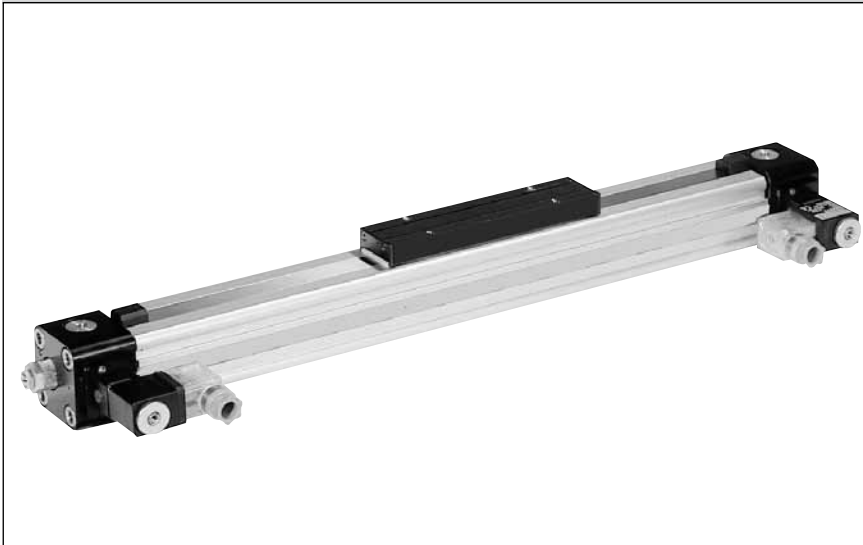

## Integrated 3/2 Way Valves VOE

For optimal control of the OSP-L cylinder, 3/2 way valves integrated into the cylinder's end caps can be used as a compact and complete solution. They allow for easy positioning of the cylinder, smooth operation at the lowest speeds and fast response, making them ideally suited for the direct control of production and automation processes.


### Characteristics:

- Complete compact solution
- Various connection possibilities: Free choice of air connection with rotating end caps with VOE valves, Air connection can be rotated 4 x 90°
- Solenoid can be rotated 4 x 90°
- Pilot valve can be rotated 180°
- High piston velocities can be achieved with max. 3 exhaust ports
- Minimal installation requirements
- Requires just one air connection per valve
- Optimal control of the OSP-L cylinder
- Excellent positioning characteristics
- Integrated operation indicator
- Integrated exhaust throttle valve
- Manual override - indexed
- Adjustable end cushioning
- Easily retrofitted – please note the increase in the overall length of the cylinder!

### Characteristics 3/2 Way Valves VOE

Characteristics	3/2 Way Valves with spring return			
Pneumatic diagram				
Type	VOE-25	VOE-32	VOE-40	VOE-50
Actuation	electrical			
Basic position	P → A open, R closed			
Type	Poppet valve, non overlapping			
Mounting	integrated in end cap			
Installation	in any position			
Port size	G 1/8	G 1/4	G 3/8	G 3/8
Temperature	-10°C to +50°C *			
Operating pressure	2-8 bar			
Nominal voltage	24 V DC / 230 V AC, 50 Hz			
Power consumption	2,5 W / 6 VA			
Duty cycle	100%			
Electrical Protection	IP 65 DIN 40050			

\* other temperature ranges on request

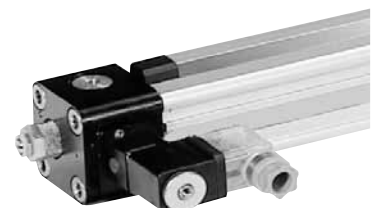



## Order Instructions – Basic Cylinder

1-4	5+6	7	8	9	10	11	12-16	17	18	19	20	21	22	23	24	25
OSPL	25	0	0	0	0	0	01100	0	0	0	0	0	0	0	0	0

Piston-Ø
25
32
40
in progress
in progress

Stroke
in mm (5 digits)

Piston Mounting
0 without
1 clevis mounting

add. Guide Carriage
0 without

Measuring system
0 without

Screws
0 standard
1 Stainless

Cushioning
0 standard
1 max. length

Version / Piston
0 standard
1 Tandem

Lubrication
0 standard


End cap position
0 l+r 0° = in front
1 l+r 90° = underneath
2 l+r 180° = at the back
3 l+r 270° = same side as outerband
4 l 90° = underneath; r 0° = in front
5 l 180° = at the back; r 0° = in front
6 l 270° = same side as outerband; r 0° = in front
7 l 0° = in front; r 90° = underneath
8 l 180° = at the back; r 90° = underneath
9 l 270° = same side as outerband; r 90° = underneath
A l 0° = in front; r 180° = at the back
B l 90° = underneath; r 180° = at the back
C l 270° = same side as outerband; r 180° = at the back
D l 0° = in front; r 270° = same side as outerband
E l 90° = underneath; r 270° = same side as outerband
F l 180° = at the back; r 270° = same side as outerband

Guides/ Brakes/ Inversion
0 without
M Inversion Ø 16-80
N Duplex Ø 25,32,40,50

Cover / Cable Channel
0 standard
1 Cable channel
2 Cable channel two-sided

Air Connection
0 standard
1 end face
2 both at one end
3 left standard right end face
4 right standard left end face
A 3/2 Way valve VOE 24 V = Ø 25,32,40,50
B 3/2 Way valve VOE 230 V~ / 110 V= Ø 25,32,40,50
C 3/2 Way valve VOE 48 V = Ø 25,32,40,50
E 3/2 Way valve VOE 110 V~ Ø 25,32,40,50

Seals
0 standard

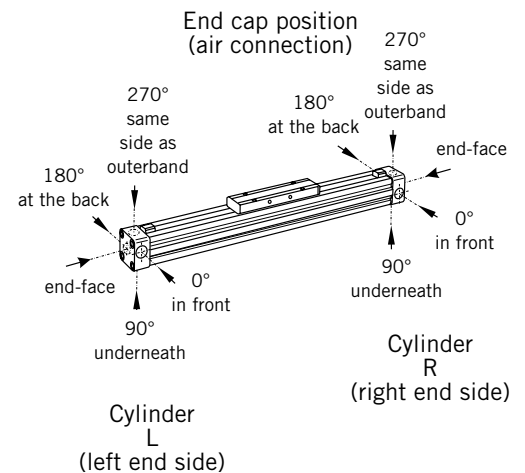

### Accessories - please order separately

Description	Further information see
End Cap Mountings	Page 38
Mid-Section Support	Page 39
Adaptor Profile	Page 48
T-Slot Profile	Page 49
Connection Profile	Page 50
Multiplex Connection	Page 52
Magnetic Switches	Page 53 and page 57



# Linear Guides Series OSP-L



## Contents

Description	Page
Overview	22
Plain bearing guide SLIDELINE	23
Recirculating Ball Bearing Guide STARLINE	27

## Linear Guides

### Adaptive modular system

The Origa system plus – OSP – provides a comprehensive range of linear guides for the pneumatic linear drives.


### Advantages:

- Takes high loads and forces
- High precision
- Smooth operation
- Can be retrofitted
- Can be installed in any position

### STANDARD Cylinder OSP-L

with integral guidance.

Piston diameters 25 - 63 mm

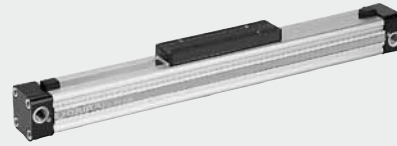

### SLIDELINE

The cost-effective plain bearing guide for medium loads.

Piston diameters 25 – 63 mm



### STARLINE

Recirculating ball bearing guide for very high loads and precision.


Piston diameters 25 – 50 mm





## Versions

for pneumatic linear drive:  
Series OSP-L

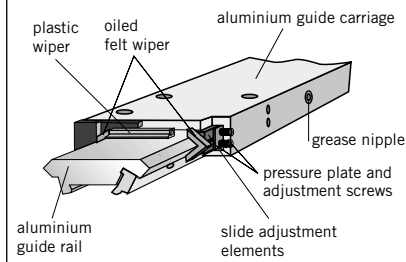


# Plain Bearing Guide SLIDELINE

**OSP**  
— ORIGA  
— SYSTEM  
— PLUS

Series SL 25 to 63  
for Linear-drive  
• Series OSP-L

## Loads, Forces and Moments

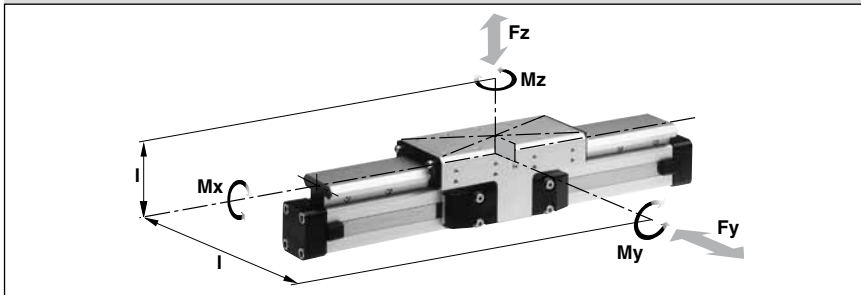

### Technical Data

The table shows the maximum permissible values for smooth operation, which should not be exceeded even under dynamic conditions.

The load and moment figures apply to speeds  $v < 0.2$  m/s.

### \* Please note:

In the cushioning diagram, add the mass of the guide carriage to the mass to be cushioned.

### Features:


- Anodised aluminium guide rail with prism-shaped slideway arrangement
  - Adjustable plastic slide elements
  - Composite sealing system with plastic and felt wiper elements to remove dirt and lubricate the slideways
  - Corrosion resistant version available on request
  - Any length of stroke up to 5500 mm (longer strokes on request)
- <sup>1)</sup> Corrosion resistant fixtures available on request

Series SL	For linear drive	Max. moments [Nm]			Max. loads [N]	Mass of linear drive with guide [kg]		Mass * of guide carriage [kg]	Order No. SLIDELINE <sup>1)</sup> Guide without cylinder
		Mx	My	Mz	Fy, Fz	with 0 mm stroke	increase per 100 mm stroke		
SL25	OSP-L25	14	34	34	675	1.55	0.39	0.61	20342FIL
SL32	OSP-L32	29	60	60	925	2.98	0.65	0.95	20196FIL
SL40	OSP-L40	50	110	110	1500	4.05	0.78	1.22	20343FIL
SL50	OSP-L50	in progress							
SL63	OSP-L63	in progress							


Mountings see page 40-42

## Dimensions

### Series OSP-L

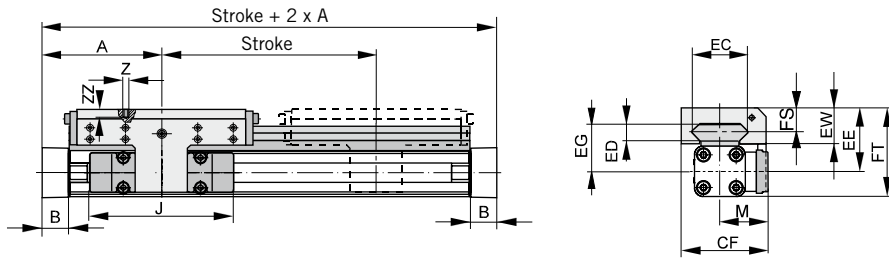

### Type SL25 to SL63

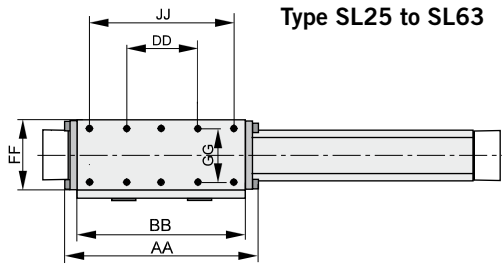

For further mounting elements and options see accessories.

For further information and technical data see linear drives OSP-L

### Dimension Table (mm)

Series	A	B	J	M	Z	AA	BB	DD	CF	EC	ED	EE	EG	EW	FF	FT	FS	GG	JJ	ZZ
SL25	100	22	117	40,5	M6	162	142	60	72,5	47	12	53	39	30	64	73,5	20	50	120	12
SL32	125	25,5	152	49	M6	205	185	80	91	67	14	62	48	33	84	88	21	64	160	12
SL40	150	28	152	55	M6	240	220	100	102	77	14	64	50	34	94	98,5	1,5	78	200	12
SL50	in progress																			
SL63	in progress																			

## Mid-Section Support

(For versions, see page 42)





Mid-section supports are required from a certain stroke length to prevent excessive deflection and vibration of the linear drive. The diagrams show the maximum permissible unsupported length in relation to loading.

A distinction must be drawn between loading 1 and loading 2.

Deflection of 0.5 mm max. between supports is permissible.

### Note:

For speeds  $v > 0.5$  m/s the distance between supports should not exceed 1 m.

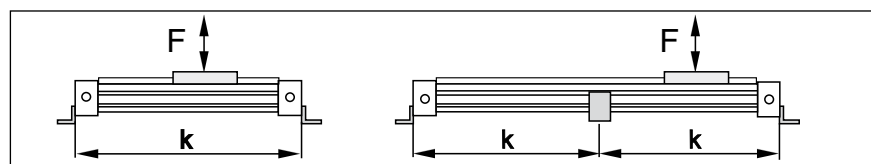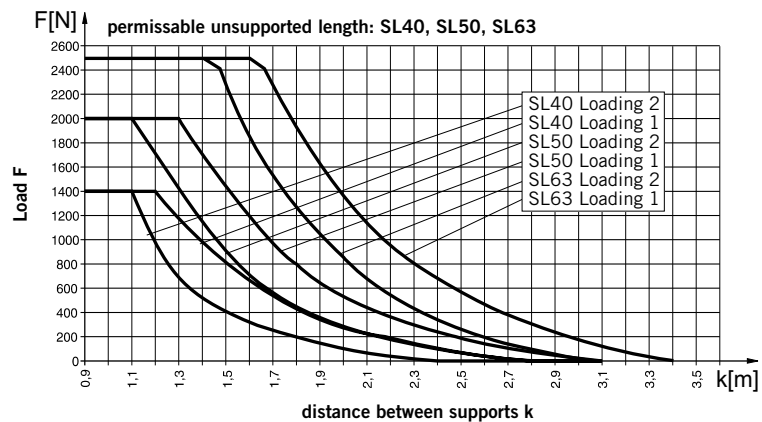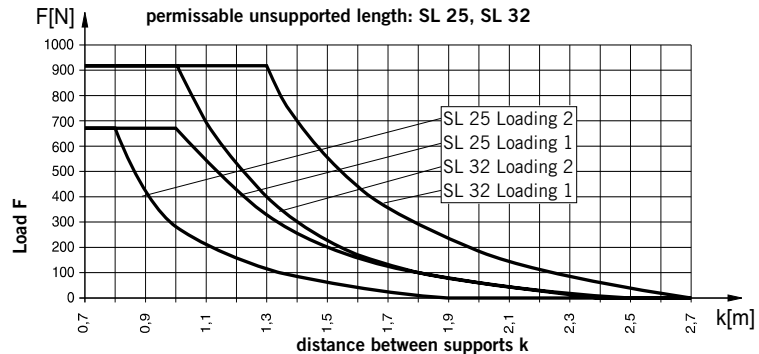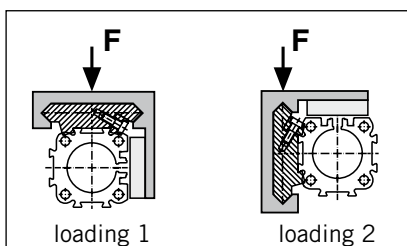

## Order Instructions – SLIDELINE

1-4	5+6	7	8	9	10	11	12-16	17	18	19	20	21	22	23	24	25
<b>OSPL</b>	25	0	0	0	0	0	01100	0	0	0	0	0	0	0	0	0

Piston-Ø
25
32
40
in progress
in progress

Stroke
in mm (5 digits)

Piston Mounting
0 without

Measuring system
0 without

Screws
0 standard
1 Stainless

Cushioning
0 standard

Version / Piston
0 standard
1 Tandem

Lubrication
0 standard

End cap position
0   r 0° = in front
1   r 90° = underneath
2   r 180° = at the back
3   r 270° = same side as outerband
4   l 90° = underneath; r 0° = in front
5   l 180° = at the back; r 0° = in front
6   l 270° = same side as outerband; r 0° = in front
7   l 0° = in front; r 90° = underneath
8   l 180° = at the back; r 90° = underneath
9   l 270° = same side as outerband; r 90° = underneath
A   l 0° = in front; r 180° = at the back
B   l 90° = underneath; r 180° = at the back
C   l 270° = same side as outerband; r 180° = at the back
D   l 0° = in front; r 270° = same side as outerband
E   l 90° = underneath; r 270° = same side as outerband
F   l 180° = at the back; r 270° = same side as outerband


Guides/ Brakes/ Inversion
0 without
2 Slideline SL Ø 25-63

Cover / Cable Channel
0 standard
1 Cable channel
2 Cable channel two-sided

Air Connection
0 standard
1 end face
2 both at one end
3 left standard right end face
4 right standard left end face
A 3/2 Way valve VOE 24 V = Ø 25,32,40,50
B 3/2 Way valve VOE 230 V~ / 110 V= Ø 25,32,40,50
C 3/2 Way valve VOE 48 V = Ø 25,32,40,50
E 3/2 Way valve VOE 110 V~ Ø 25,32,40,50

Seals
0 standard


add. Guide Carriage
0 without
2 Guide Carriage Slideline SL Ø 25-63

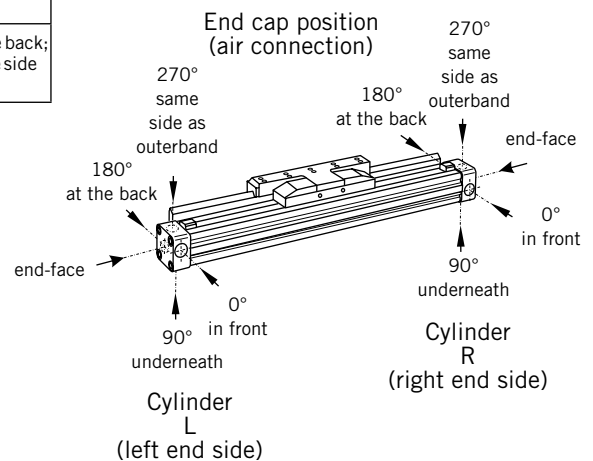



## Versions

for pneumatic linear drive:  
Series OSP-L

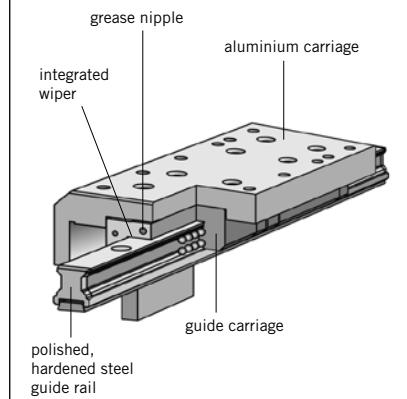


# Recirculating Ball Bearing Guide STARLINE

**OSP**  
— ORIGA  
— SYSTEM  
— PLUS

Series STL 25 to 50  
for Linear Drive Series OSP-L

## Loads, Forces and Moments

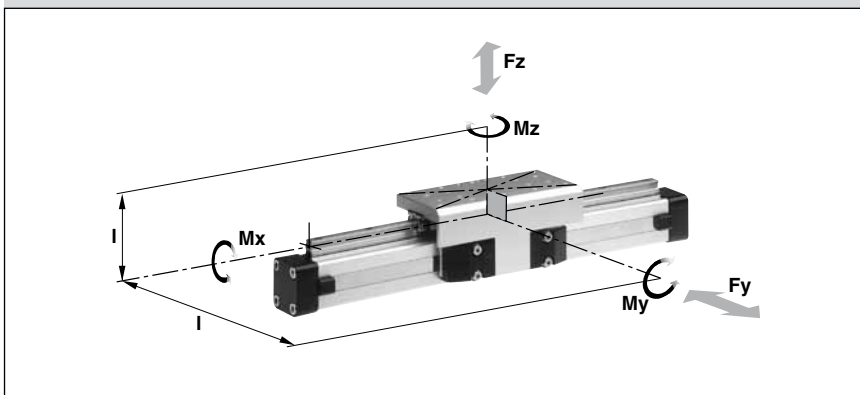

### Features:

- Polished and hardened steel guide rail
- For very high loads in all directions
- High precision
- Integrated wiper system
- Integrated grease nipples
- Any length of stroke up to 3700 mm
- Anodized aluminium guide carriage – dimensions compatible with OSP-L guides SLIDELINE
- Installation height (STL25 - 32) compatible with OSP-L guides SLIDELINE
- Maximum speed  
STL25 to 50:  $v = 5 \text{ m/s}$

### Technical Data

The table shows the maximum permissible loads. If multiple moments and forces act upon the cylinder simultaneously, the following equation applies:

$$\frac{M_x}{M_{x_{\max}}} + \frac{M_y}{M_{y_{\max}}} + \frac{M_z}{M_{z_{\max}}} + \frac{F_y}{F_{y_{1\max}}} + \frac{F_z}{F_{z_{\max}}} \leq 1$$

The sum of the loads should not exceed >1

The table shows the maximum permissible values for light, shock-free operation, which must not be exceeded even under dynamic conditions.


### \* Please note:

The mass of the carriage has to be added to the total moving mass when using the cushioning diagram.

Series STL	For linear drive	Max. moments [Nm]			Max. loads [N]		Mass of linear drive with guide [kg]		Mass * of guide carriage [kg]	Order No. STARLINE Guide without cylinder
		Mx	My	Mz	Fy	Fz	with 0 mm stroke	increase per 100 mm stroke		
STL25	OSP-L25	50	110	110	3100	3100	1.733	0.369	0.835	21112FIL
STL32	OSP-L32	62	160	160	3100	3100	2.934	0.526	1.181	21113FIL
STL40	OSP-L40	150	400	400	4000	7500	4.452	0.701	1.901	21114FIL
STL50	OSP-L50						in progress			

Mountings see page 40-46

## Dimensions Series OSP-L STL25 to STL50

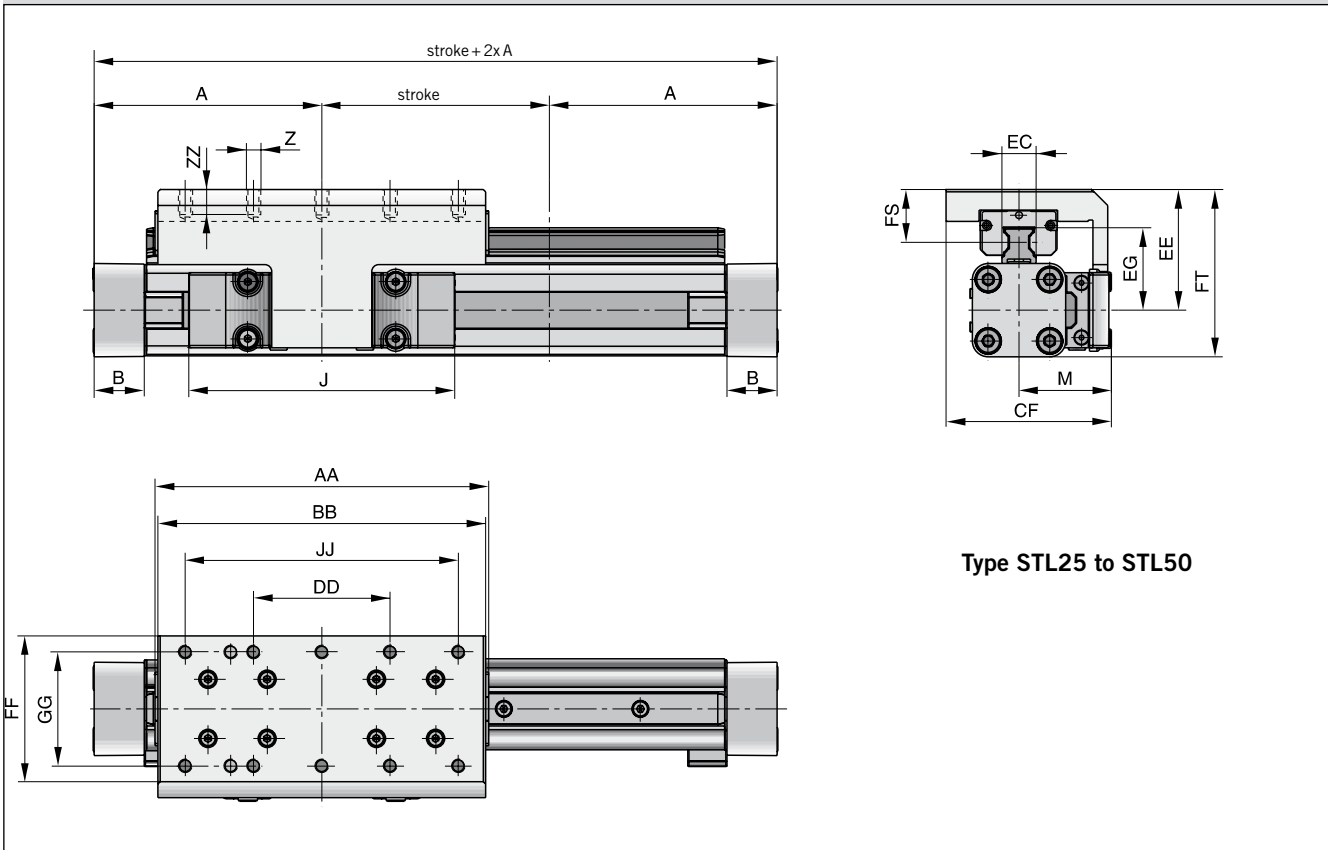


### Dimension Table (mm) Series OSP-L STL25 to STL50

Series	A	B	J	M	Z	AA	BB	CF	DD	EC	EE	EG	FF	FS	FT	GG	JJ	ZZ
<b>STL25</b>	100	22	117	40.5	M6	146.6	144	72.5	60	15	53	36.2	64	23.2	73.5	50	120	12
<b>STL32</b>	125	25.5	152	49	M6	186.6	184	91	80	15	62	42.2	84	26.2	88	64	160	12
<b>STL40</b>	150	28	152	55	M6	231	226	102	100	20	72	51.6	94	28.5	106.5	78	200	12
<b>STL50</b>																		


### Permissible Unsupported Length STL25 to STL50

Loading 1 – Top carrier

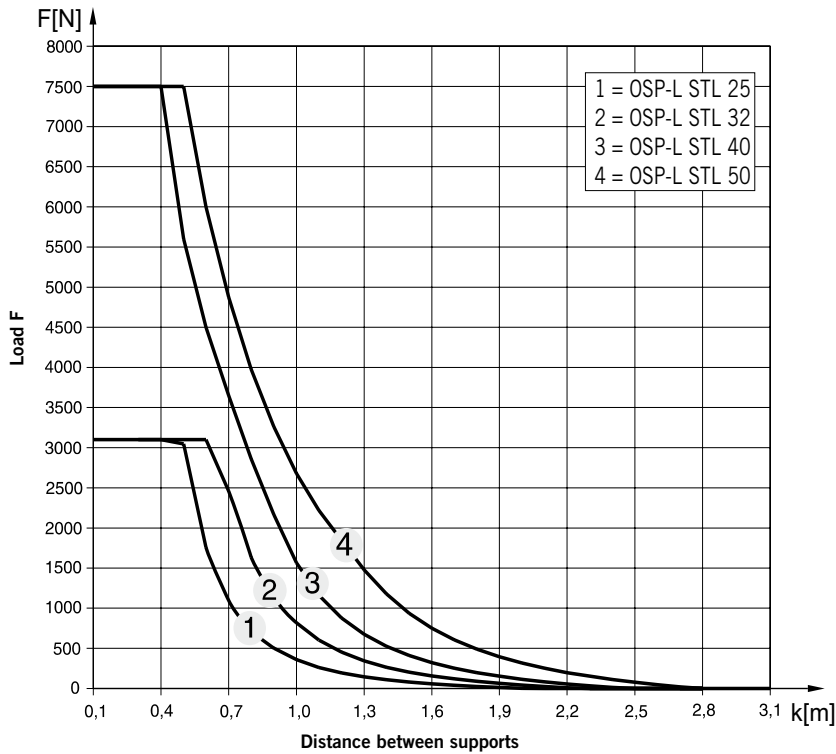

### Permissible Unsupported Length STL25 to STL50


Loading 2 – Side carrier

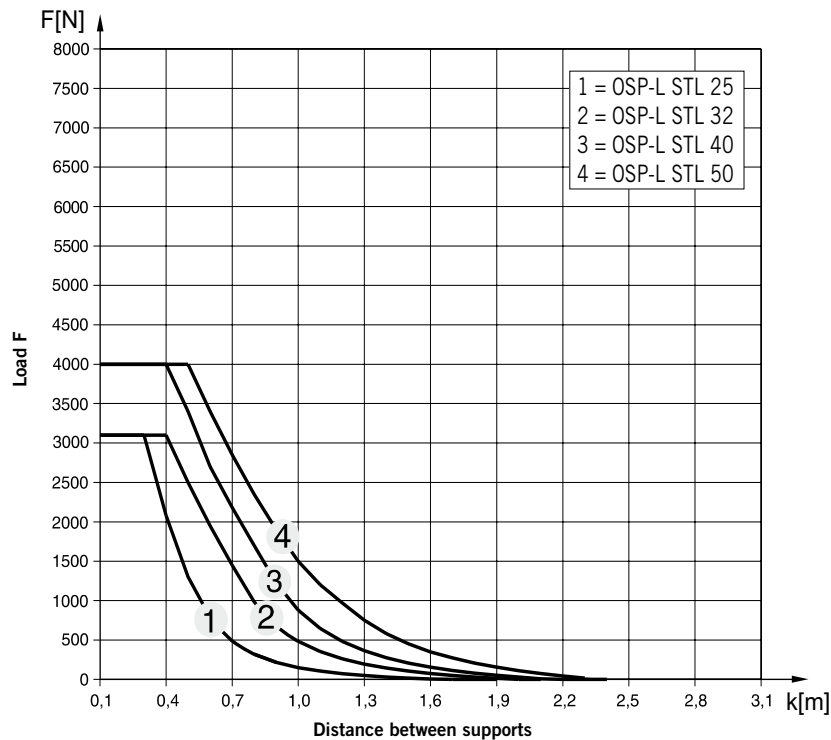

## Mid-Section Support

(For versions, see page 45)

Mid-section supports are required from a certain stroke length to prevent excessive deflection and vibration of the linear drive. The diagrams show the maximum permissible unsupported length in relation to loading. A distinction must be drawn between loading 1 and loading 2. Deflection of 0.5 mm max. between supports is permissible.

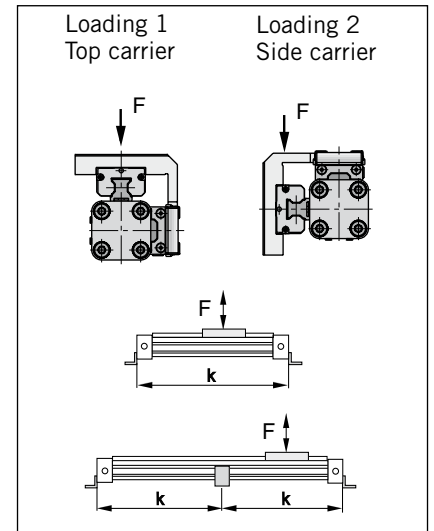

#### Note:

For speeds  $v > 0.5$  m/s the distance between supports should not exceed 1 m.

## Variable Stop

The variable stop Type VS provides simple stroke limitation.


It can be retrofitted and positioned anywhere along the stroke length. For every cylinder diameter two types of shock absorber are available – see „Shock Absorber Selection“ below.

Mid-section supports and magnetic switches can still be fitted on the same side as the variable stop.

Depending on the application, two variable stops can be fitted if required.

### Variable Stop Type VS25 to VS50

Arrangement with two variable stops

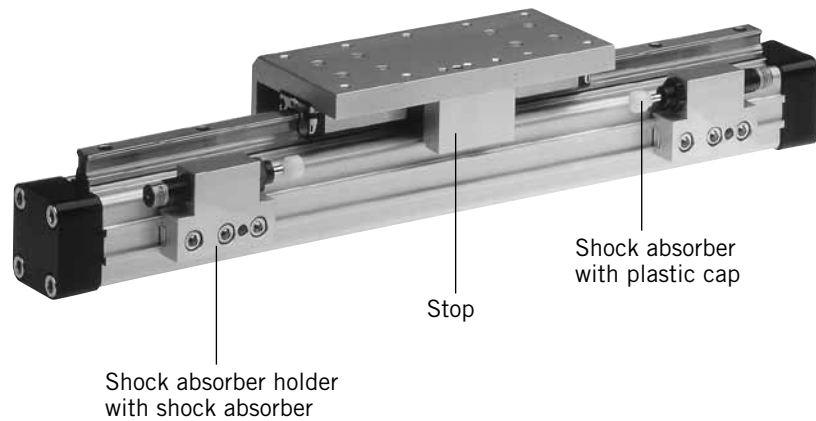


## Shock Absorber Selection

The shock absorber is selected in dependence on the mass and speed.

The mass of the carrier itself must be taken into account.


### Shock Absorber Selection in Dependence on Mass and Speed for Series OSP-STL25

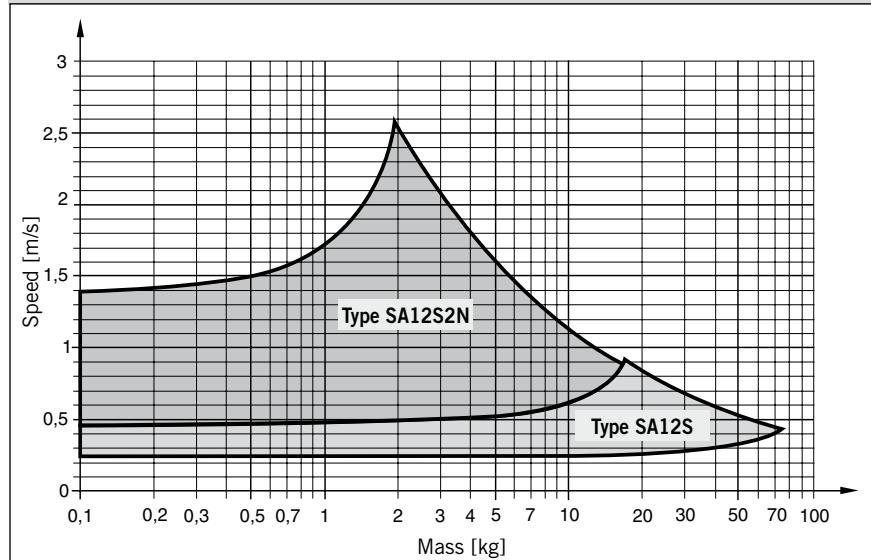

The values relate to an effective driving force of 250 N (6 bar)




**Shock Absorber Selection in Dependence on Mass and Speed for Series OSP-L-STL32**

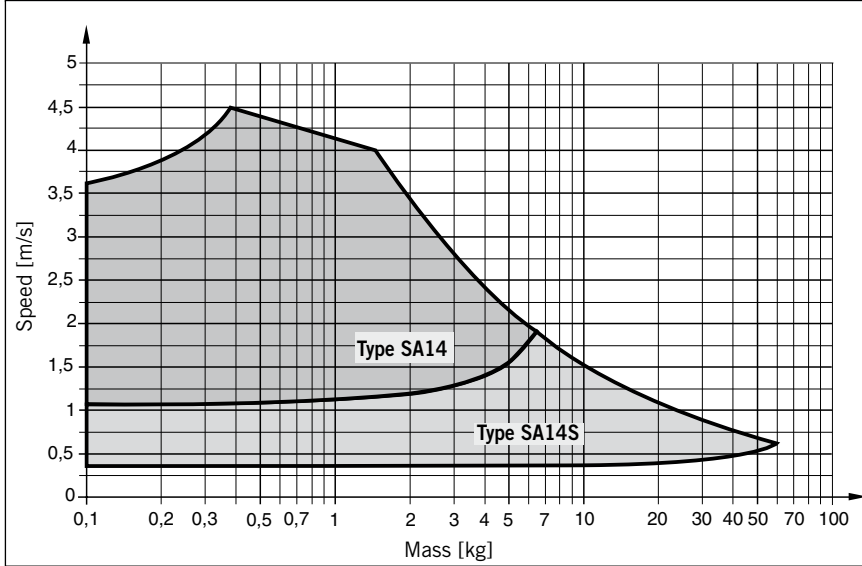


The values relate to an effective driving force of 420 N (6 bar)

**Shock Absorber Selection in Dependence on Mass and Speed for Series OSP-L-STL40**

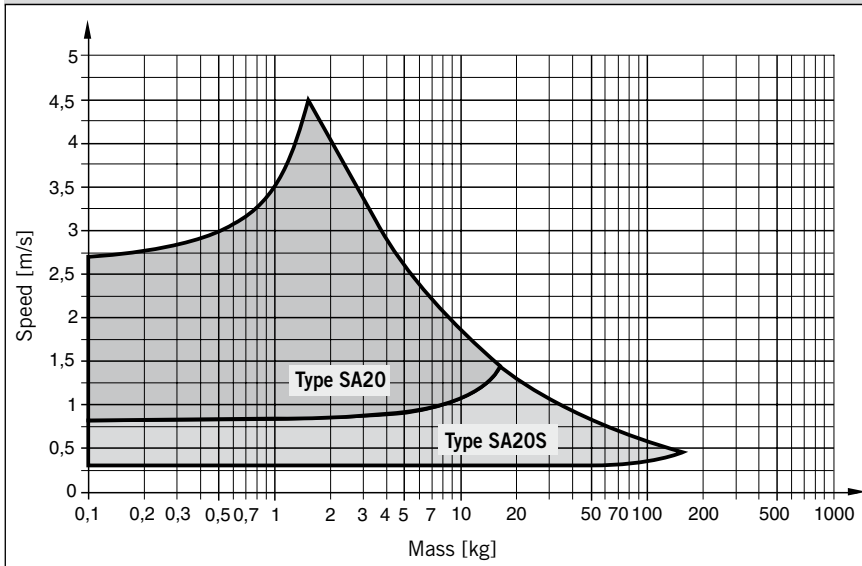

The values relate to an effective driving force of 640 N (6 bar)


**Shock Absorber Selection in Dependence on Mass and Speed for Series OSP-L-STL50**

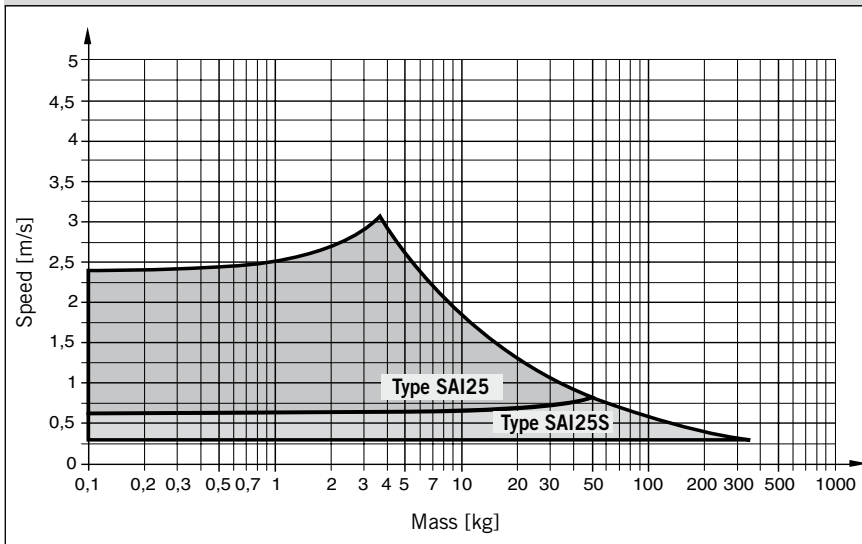

The values relate to an effective driving force of 1000 N (6 bar)

The right to introduce technical modifications is reserved


### Dimensions – Variable Stop Type VS25 to VS50

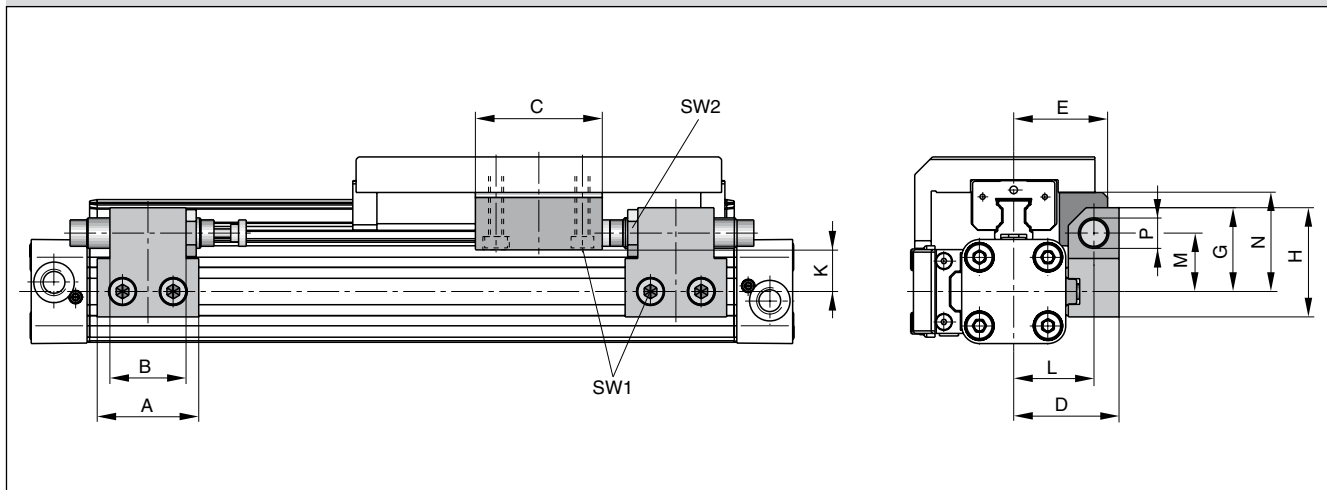

### Dimension Table (mm) – Variable Stop Type VS25 to VS50

Series	Type	A	B	C	D	E	G	H	K	L	M	N	P	SW1	SW2
OSP-STL25	VS25	40	30	50	41.5	37	33	43	18	31.5	23	39	M12x1	5	16
OSP-STL32	VS32	60	40	50	45.5	42	35	45	19	35.5	25	48	M14x1.5	5	17
OSP-STL40	VS40	84	52	60	64	59	48	63	25.6	50	34	58.6	M20x1.5	5	24
OSP-STL50	VS50														

### Order Information – Variable Stop Type VS25 to VS50

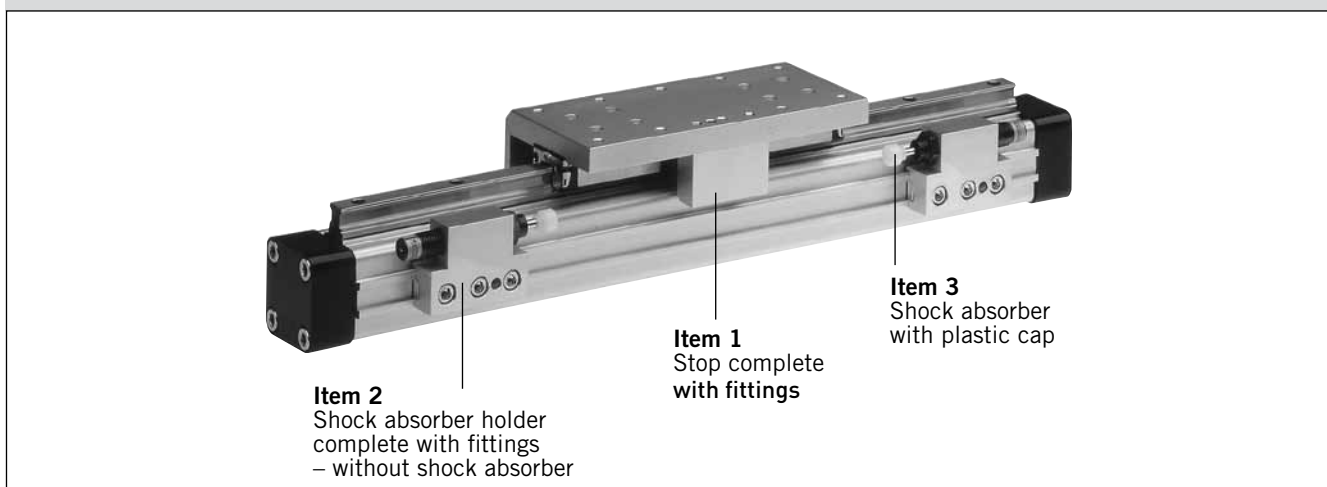

### Order Instructions – Variable Stop Type VS25 to VS50

without cylinder and without guide

Item	Description	Size							
		VS25		VS32		VS40		VS50	
		Type	Order-No.	Type	Order-No.	Type	Order-No.	Type	Order-No.
1	Stop, complete	–	21197FIL	–	21198FIL	–	21199FIL		
2	Shock absorber holder complete	–	21202FIL	–	21203FIL	–	21204FIL	in progress	
3*	Shock absorber, soft	SA12S2N	7723FIL	SA14	7708FIL	SA20	7710FIL		
	Shock absorber, hard	SA12S	7707FIL	SA14S	7709FIL	SA20S	7711FIL		

\* Shock absorber with plastic cap

Note: Order instructions for VS in combination with the cylinder and guide see page 33, pos. 18

## Order Instructions – STARLINE

1-4	5+6	7	8	9	10	11	12-16	17	18	19	20	21	22	23	24	25
<b>OSPL</b>	25	0	0	0	0	0	01100	0	0	0	0	0	0	0	0	0

Piston-Ø
25
32
40
in progress

Stroke
in mm (5 digits)

Piston Mounting
0 without

Measuring system
0 without

Screws
0 standard

Cushioning
0 standard
1 max. length
2 variable stop complete VS soft left for Starline
3 variable stop complete VS hard left for Starline,
4 variable stop complete VS soft right for Starline
5 variable stop complete VS hard right for Starline
6 variable stop complete VS soft both sides for Starline
7 variable stop complete VS hard both sides for Starline

Cover / Cable Channel
0 standard
1 Cable channel
2 Cable channel two-sided

Version / Piston
0 standard
1 Tandem

Lubrication
0 standard


Air Connection
0 standard
1 end face
2 both at one end
3 left standard right end face
4 right standard left end face
A 3/2 Way valve VOE 24 V = Ø 25,32,40,50
B 3/2 Way valve VOE 230 V~ / 110 V= Ø 25,32,40,50
C 3/2 Way valve VOE 48 V = Ø 25,32,40,50
E 3/2 Way valve VOE 110 V~ Ø 25,32,40,50

Seals
0 standard

End cap position
0 l+r 0° = in front
1 l+r 90° = underneath
2 l+r 180° = at the back
3 l+r 270° = same side as outerband
4 l 90° = underneath; r 0° = in front
5 l 180° = at the back; r 0° = in front
6 l 270° = same side as outerband; r 0° = in front
7 l 0° = in front; r 90° = underneath
8 l 180° = at the back; r 90° = underneath
9 l 270° = same side as outerband; r 90° = underneath
A l 0° = in front; r 180° = at the back
B l 90° = underneath; r 180° = at the back
C l 270° = same side as outerband; r 180° = at the back
D l 0° = in front; r 270° = same side as outerband
E l 90° = underneath; r 270° = same side as outerband
F l 180° = at the back; r 270° = same side as outerband

Guides/ Brakes/ Inversion
0 without
B Starline STL

add. Guide Carriage
0 without
B Guide Carriage Starline STL

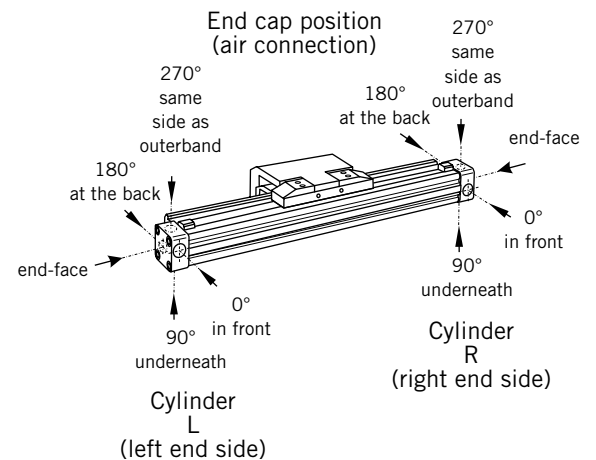

















# Linear Drive-Accessories (Mountings and Magnetic Switches) Series OSP-L




## Contents

Description	Page
Overview	36
Clevis Mounting	37
End Cap Mountings	38
Mid-Section Support	39
Mountings for Linear Drives with guides	40-46
Inversion Mounting	47
Adaptor Profile	48
T-Slot Profile	49
Connection Profile	50
Duplex Connection	51
Multiplex Connection	52
Magnetic Switch, standard version	53-55
Cable Cover	56
Magnetic Switch for T-Nut mounting	57-60

Linear Drive Accessories for Series OSP-L		
Description		
Clevis Mounting		Page 37
End Cap Mountings		Page 38
End Cap Mountings (for Linear Drives with guides)		Page 41, 43, 44
Mid-Section Support		Page 39
Mid-Section Support (for Linear Drives with guides)		Page 42, 45, 46
Inversion Mounting		Page 47
Adaptor Profile		Page 48
T-Slot Profile		Page 49
Connection Profile		Page 50
Dulex Connection		Page 51
Multiplex Connection		Page 52
Magnetic Switch, standard version		Page 53
Magnetic Switch for T-Nut mounting		Page 57
Cable cover		Page 56

Series OSP-L25 to L32

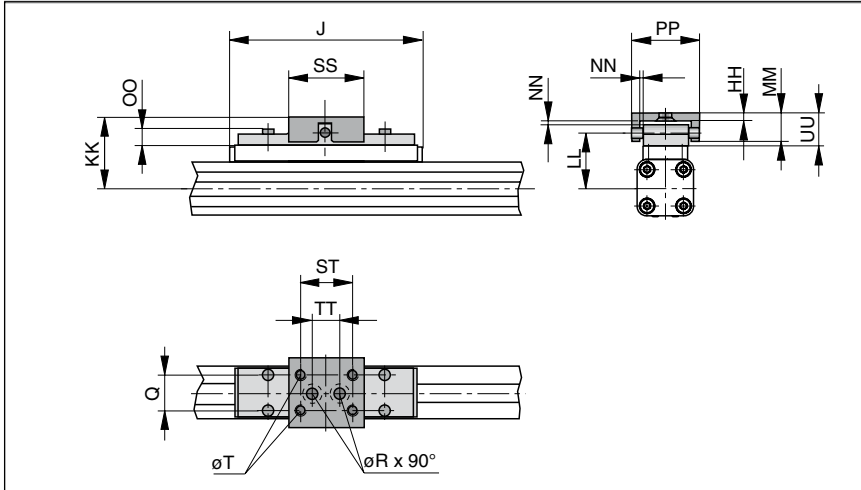

# Linear Drive Accessories


## ø 25-63 mm

### Clevis Mounting



For Linear-drive  
• Series OSP-L

Series OSP-L40 to L63

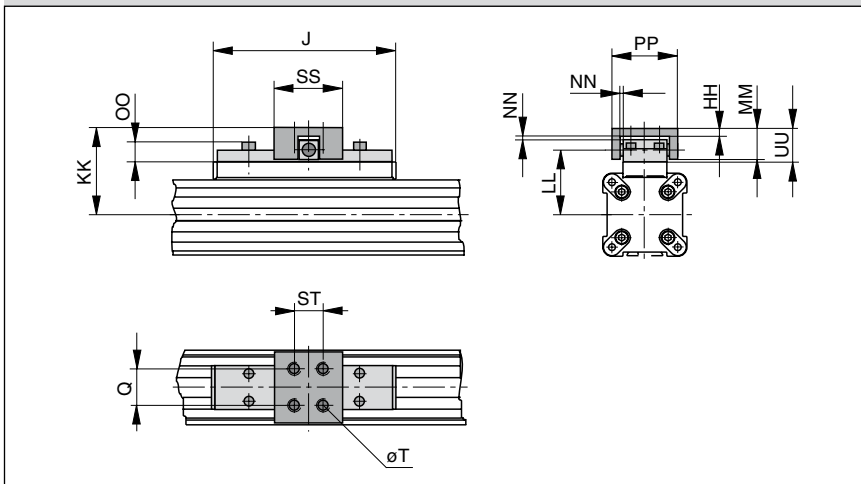



When external guides are used, parallelism deviations can lead to mechanical strain on the piston. This can be avoided by the use of a clevis mounting. In the drive direction, the mounting has very little play. Freedom of movement is provided as follows:

- Tilting in direction of movement
- Vertical compensation
- Tilting sideways
- Horizontal compensation

A stainless steel version is also available.

**Please note:**

When using additional inversion mountings, take into account the dimensions.

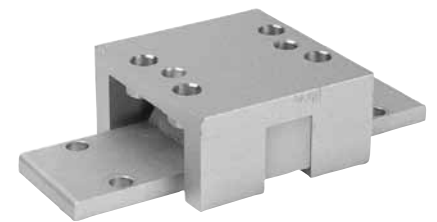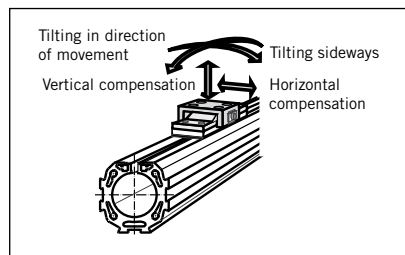

Dimension Table (mm)

Order instructions in combination with basic cylinder see page 19, Pos. 19

Series	J	Q	T	øR	HH	KK	LL	MM	NN*	OO	PP	SS	ST	TT	UU	Order No.	
																Standard	Stainless
OSP-L25	117	16	M5	5.5	3.5	52	39	19	2	9	38	40	30	16	21	20005FIL	20092FIL
OSP-L32	152	25	M6	6.6	6	68	50	28	2	13	62	60	46	40	30	20096FIL	20094FIL
OSP-L40	152	25	M6	—	6	74	56	28	2	13	62	60	46	—	30	20024FIL	20093FIL
OSP-L50	in progress																
OSP-L63	in progress																

\* Dimension NN gives the possible plus and minus play in horizontal and vertical movement, which also makes tilting sideways possible.

# Linear Drive Accessories

## ∅ 25-63 mm End Cap Mountings



For Linear-drive  
• Series OSP-L

On the end-face of each end cap there are four threaded holes for mounting the actuator.

The hole layout is square, so that the mounting can be fitted to the bottom, top or either side, regardless of the position chosen for the air connection.

Material:

Series OSP-L25 – L32:

Galvanised steel.


Series OSP-L40 – L63:

Anodized aluminium.


The mountings are supplied in pairs.



Series OSP-L25 to L32: Type A1

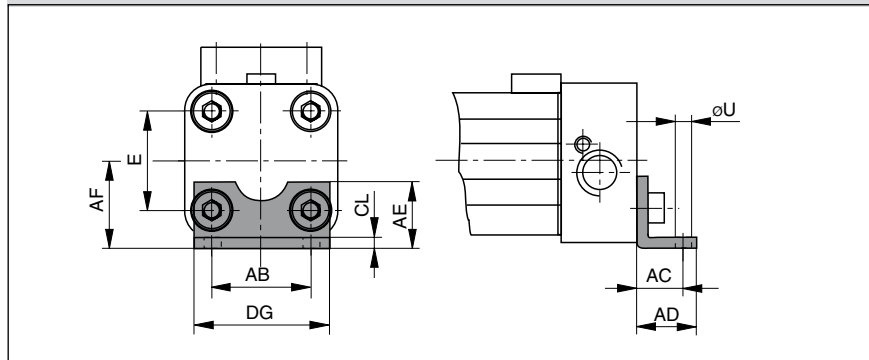

Series OSP-L40 to L63: Type C1

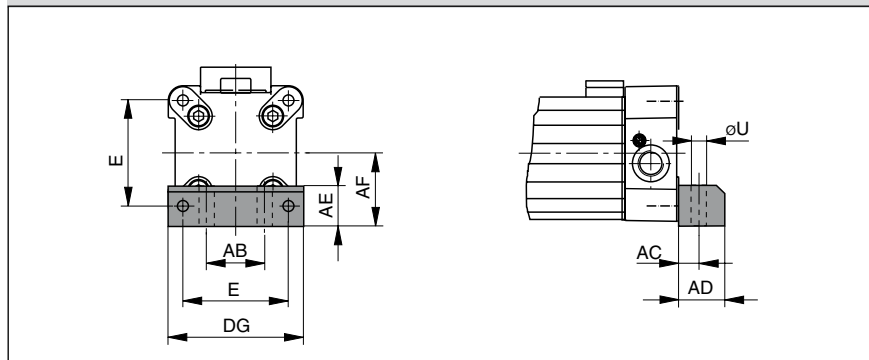


Dimension Table (mm)

For Series	E	∅U	AB	AC	AD	AE	AF	CL	DG	Order No. (*	
										Type A1	Type C1
OSP-L25	27	5.8	27	16	22	18	22	2.5	39	2010FIL	–
OSP-L32	36	6.6	36	18	26	20	30	3	50	3010FIL	–
OSP-L40	54	9	30	12.5	24	24	38	–	68	–	4010FIL
OSP-L50											
OSP-L63											


(\* = Pair)



**Series OSP-L25 to L63: Type E1**  
(Mounting from above / below using a cap screw)

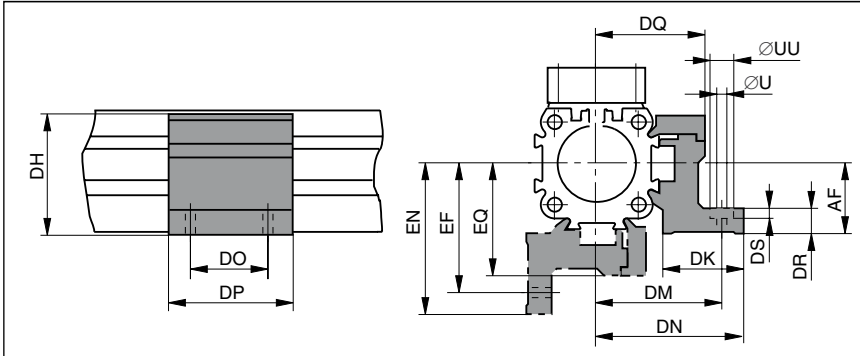

**Series OSP-L25 to L63, Type D1**  
(Mountings from below with 2 screws)

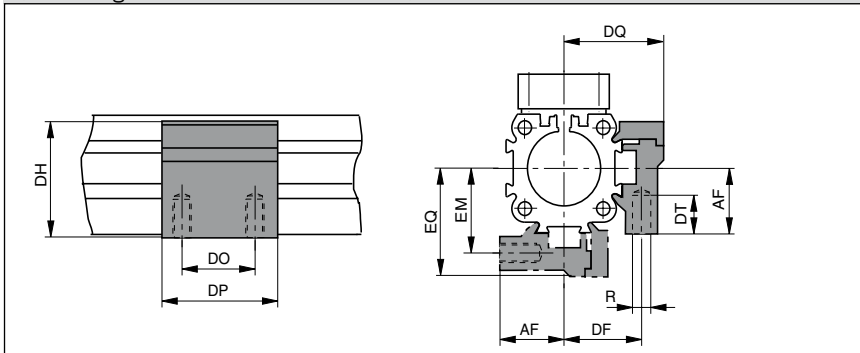

# Linear Drive Accessories

## ø 25-63 mm

### Mid-Section Support



For Linear-drive  
• Series OSP-L

Note on Types E1 and D1 (L25-L63):  
The mid-section support can also be mounted on the underside of the actuator, in which case its distance from the centre of the actuator is different.

Stainless steel version on demand.



**Dimension Table (mm) – Series OSP L25 to L63**

Series	R	U	UU	AF	DF	DH	DK	DM	DN	DO	DP	DQ	DR	DS	DT	EF	EM	EN	EQ	Order No.		
																				Type E1	Type D1	
OSP-L25	M5	5.5	10	22	27	38	26	40	47.5	36	50	34.5	8	5.7	10	41.5	28.5	49	36	20009FIL	20008FIL	
OSP-L32	M5	5.5	10	30	33	46	27	46	54.5	36	50	40.5	10	5.7	10	48.5	35.5	57	43	20158FIL	20157FIL	
OSP-L40	M6	7	-	38	35	61	34	53	60	45	60	45	10	-	11	56	38	63	48	20028FIL	20027FIL	
OSP-L50	in progress																					
OSP-L63	in progress																					

The right to introduce technical modifications is reserved





# Linear Drive Accessories


## Mountings for Linear Drives fitted with OSP-L-Guides




For Linear-drives  
• Series OSP-L


**Note:**  
For mountings and mid-section supports for linear drives with recirculating ball bearing guide STARLINE see pages 43 to 46.

Overview						
Mounting Type	Type	Type – OSP-L Guide SLIDELINE				
		25	32	40	50	63 <sup>1)</sup>
 End cap mounting	Type A2	O	O			
	Type A3					
 End cap mounting, reinforced	Type B1	X	X			
	Type B4					
	Type B5					
 End cap mounting	Type C1			X	X	X
	Type C2			O	O	
	Type C3					O
	Type C4					
 Mid section support, small Mid section support, wide	Type D1	X	X	X	X	X
	Type E1	X	X	X	X	X
	Type E2	O	O	O	O	
	Type E3					O

- X = carriage mounted in top (12 o'clock position)
- O = carriage mounted in lateral (3 or 9 o'clock position)
-  = available components
- <sup>1)</sup> = not available for all sizes

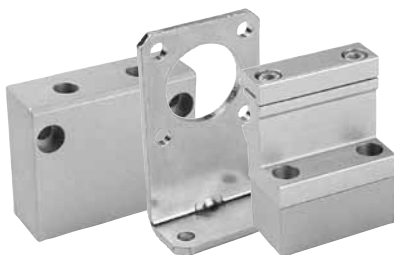

**Series OSP-L25, L32: Type A**

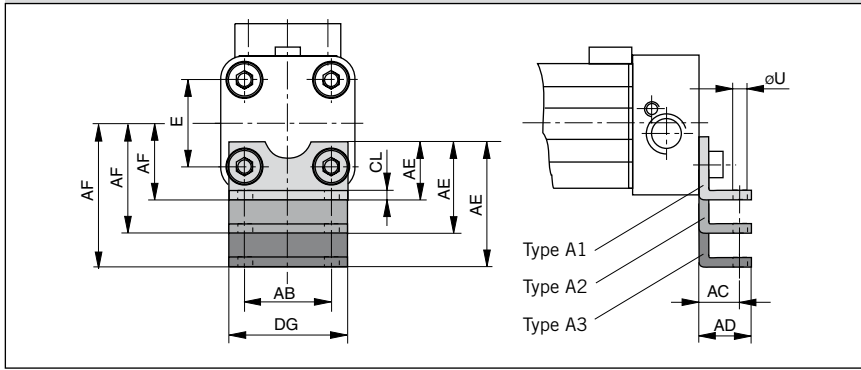

**End cap mountings\***


Four internal screw threads are located in the end faces of all OSP-L actuators for mounting the drive unit. End cap mountings may be secured across any two adjacent screws.

**Material:** Series OSP-L25, L32:  
Galvanised steel

Series OSP-L40, L50, L63:  
Anodized aluminium

The mountings are supplied in pairs.


**Series OSP-L25, L32: Type B**

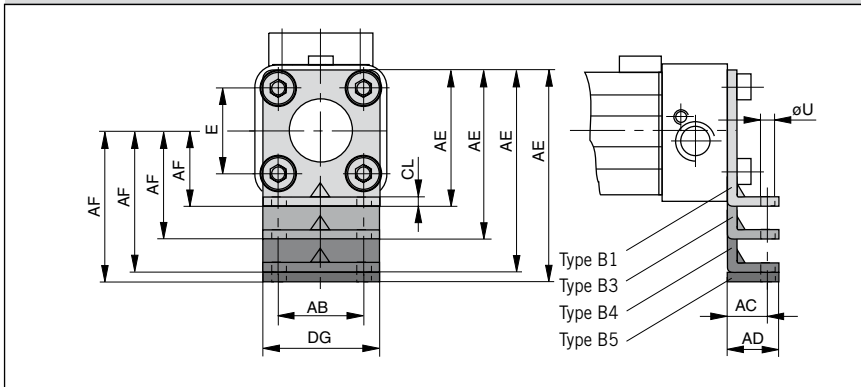

**Dimension Table (mm)**  
– Dimensions AE and AF (Dependant on the mounting type)

Mount type	Dimensions AE for size					AF for size				
	25	32	40	50	63	25	32	40	50	63
A1	18	20	-			22	30	-		
A2	33	34	-			37	44	-		
A3	45	42	-			49	52	-		
B1	42	55	-			22	30	-		
B4	80	85	-			60	60	-		
B5	-	90	-			-	65	-		
C1	-	-	24			-	-	38		
C2	-	-	37			-	-	51		
C3	-	-	46			-	-	60		
C4	-	-	56			-	-	70		

**Series OSP-L40, L50, L63: Type C**

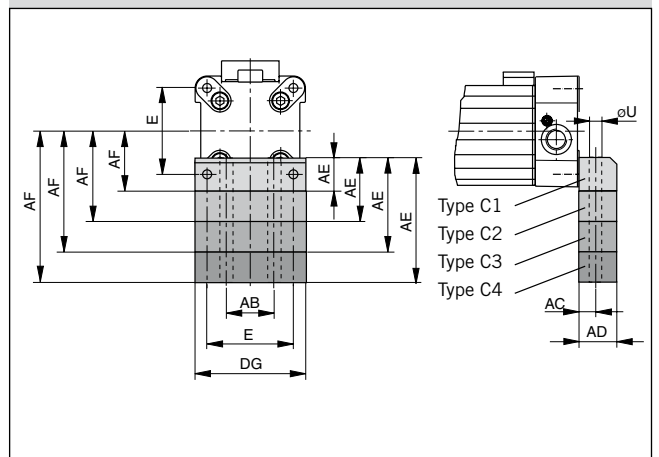

**Dimension Table (mm)**

For Series	E	øU	AB	AC	AD	CL	DG
OSP-L25	27	5.8	27	16	22	2.5	39
OSP-L32	36	6.6	36	18	26	3	50
OSP-L40	54	9	30	12.5	24	-	68
OSP-L50							
OSP-L63							

\* see mounting instructions

The right to introduce technical modifications is reserved

# Mid-Section Support

Information regarding type E1 and D1:


Mounting of the mid section supports is also possible on the lower side of the drive. In this case, please note the new centre line dimensions.

See layout information


Stainless steel version on request.



**Series OSP-L25 to L63: Type E**  
(Mounting from above / below using a cap screw)

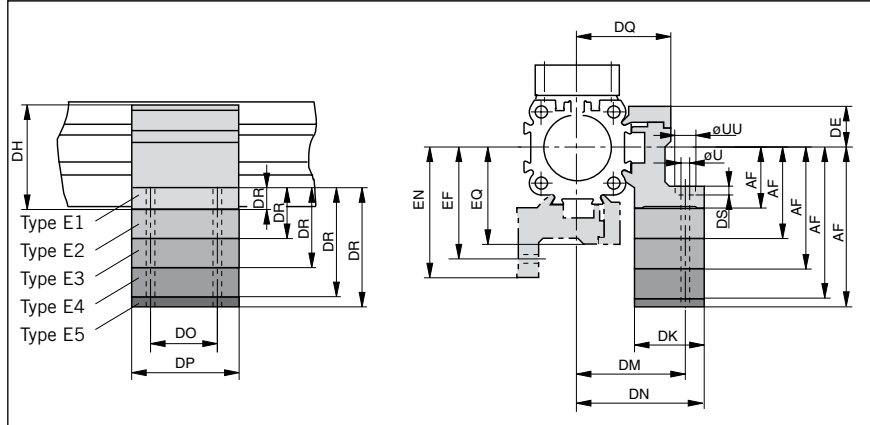

**Series OSP-L25 to L63: Type D1**  
(Mounting from below with thread screw)

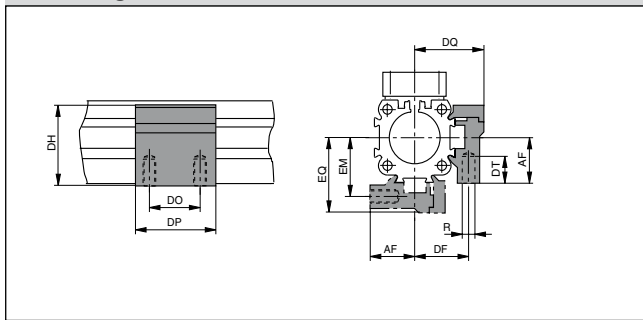

**Dimension Table (mm)**  
– Dimensions AF and DR (Dependant on the mounting type)

Mount type	Dimensions DR for size					AF for size				
	25	32	40	50	63	25	32	40	50	63
D1	-	-	-	-	-	22	30	38	-	-
E1	8	10	10	-	-	22	30	38	-	-
E2	23	24	23	-	-	37	44	51	-	-
E3	35	32	32	-	-	49	52	60	-	-
E4	46	40	42	-	-	60	60	70	-	-
E5	-	45	-	-	-	-	65	-	-	-

**Dimension Table (mm)**

Series	R	U	UU	DE	DF	DH	DK	DM	DN	DO	DP	DQ	DS	DT	EF	EM	EN	EQ
OSP-L25	M5	5.5	10	16	27	38	26	40	47.5	36	50	34.5	5.7	10	41.5	28.5	49	36
OSP-L32	M5	5.5	10	16	33	46	27	46	54.5	36	50	40.5	5.7	10	48.5	35.5	57	43
OSP-L40	M6	7	-	23	35	61	34	53	60	45	60	45	-	11	56	38	63	48
OSP-L50	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
OSP-L63	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-

**Ordering information for mountings Type A – Type B – Type C – Type D – Type E**


Mounting type (versions)	Order No. Size				
	25	32	40	50	63
A1 *)	2010FIL	3010FIL	-	-	-
A2 *)	2040FIL	3040FIL	-	-	-
A3 *)	2060FIL	3060FIL	-	-	-
B1 *)	20311FIL	20313FIL	-	-	-
B4 *)	20312FIL	20314FIL	-	-	-
B5 *)	-	20976FIL	-	-	-
C1 *)	-	-	4010FIL	-	-
C2 *)	-	-	20338FIL	-	-
C3 *)	-	-	20339FIL	-	-
C4 *)	-	-	20340FIL	-	-
D1	20008FIL	20157FIL	20027FIL	-	-
E1	20009FIL	20158FIL	20028FIL	-	-
E2	20352FIL	20355FIL	20358FIL	-	-
E3	20353FIL	20356FIL	20359FIL	-	-
E4	20354FIL	20357FIL	20360FIL	-	-
E5	-	20977FIL	-	-	-

\*) Pair

Series OSP-L STL25, STL32 : Type B1

Installation:

Top carrier  
Side piston

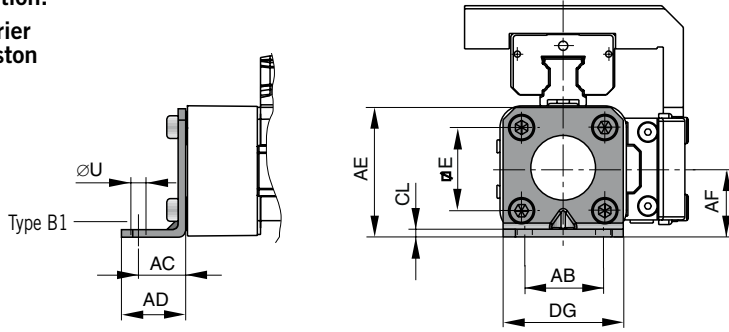

# Linear Drive Accessories

Ø 25 to 32 mm  
End Cap Mounting  
Type: B


for Linear Drives with  
Recirculating Ball Bearing Guide

- Series OSP-L STL

Series OSP-L STL25, STL32: Type B3 (Ø 32:B5)

Installation:

Side carrier  
Piston below

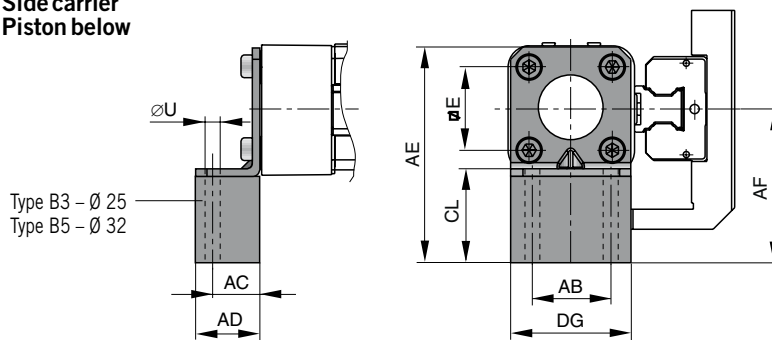


Material:  
Galvanised steel  
Anodized aluminium

The mountings are supplied in pairs.

Series OSP-L STL25, STL32: Type B2

Installation:

Side carrier  
Top piston

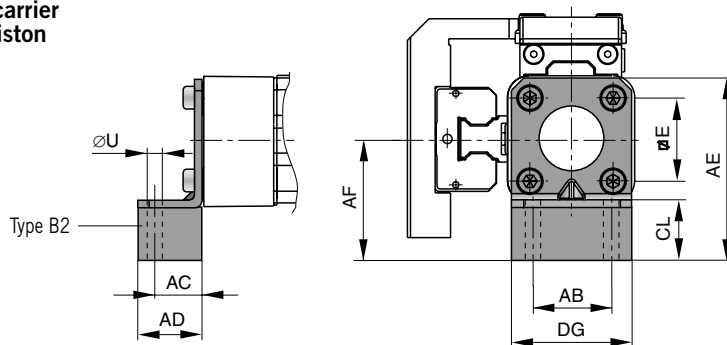

Dimension Table (mm) for End Cap Mounting Type: B1 to B5

For Series	Mounting Type	E	ØU	AB	AC	AD	AE	AF	CL	DG	Order No. (pair)
OSP-L STL25	B1	27	5.8	27	16	22	42	22	2.5	39	20311FIL
	B2	27	5.8	27	16	22	57	37	17.5	39	21138FIL
	B3	27	5.8	27	16	22	69	49	29.5	39	21139FIL
OSP-L STL32	B1	36	6.6	36	18	26	55	30	3	50	20313FIL
	B2	36	6.6	36	18	26	69	44	17	50	21140FIL
	B5	36	6.6	36	18	26	90	65	9	50	21141FIL



# Ø 40 to 50 mm End Cap Mounting Type: C

for Linear Drives with Recirculating  
Ball Bearing Guide

- Series OSP-L STL


**Material:**

Anodized aluminium

The mountings are supplied in pairs.


**Series OSP-L STL40, STL50: Type C1**

Installation:  
Top carrier  
Side piston

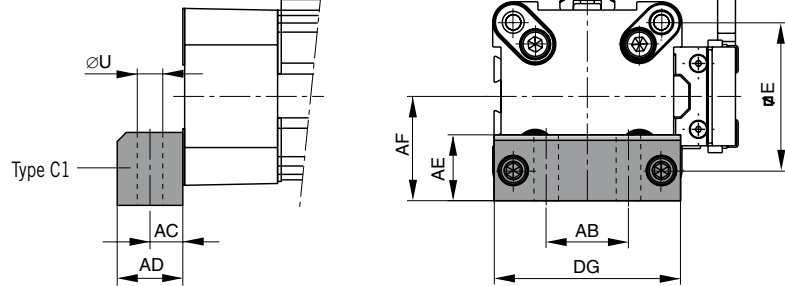


**Series OSP-L STL40, STL50: Type C4 (Ø 50: C3)**

Installation:  
Side carrier  
Piston below

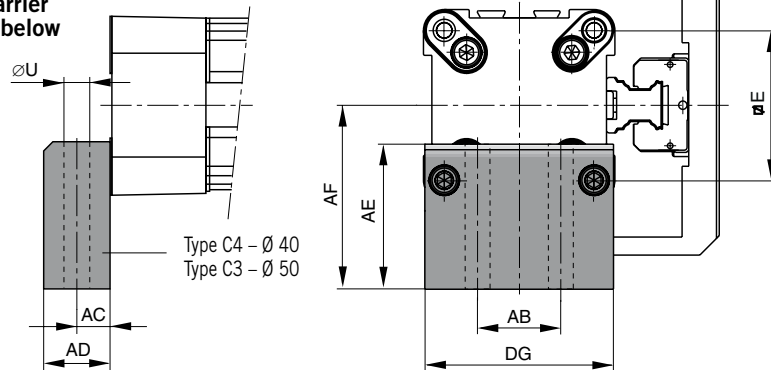

**Series OSP-L STL40, STL50: Type C2**

Installation:  
Side carrier  
Top piston

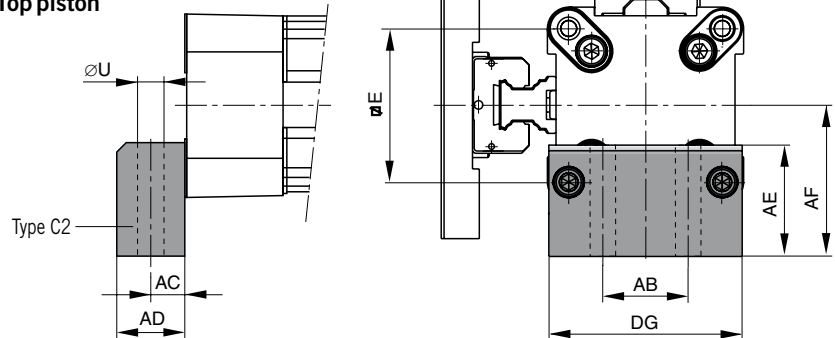


**Dimension Table (mm) for End Cap Mounting Type: C1 to C4**

For Series	Mounting Type	E	ØU	AB	AC	AD	AE	AF	DG	Order No. (pair)
OSP-L STL40	C1	54	9	30	12.5	24	24	38	68	4010FIL
	C2	54	9	30	12.5	24	37	51	68	20338FIL
	C4	54	9	30	12.5	24	56	70	68	20340FIL
OSP-L STL50	C1									
	C2						in progress			
	C3									

Series OSP-L STL25 to STL50: Type D1ST

Mountings from below with 2 screws

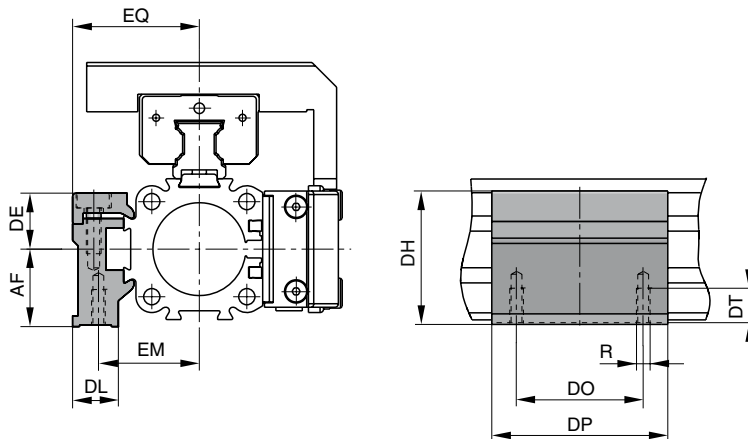

# Linear Drive Accessories

## Ø 25 to 50

### Mid-Section Support

#### Type: D1ST

for Linear Drives with Recirculating Ball Bearing Guide

- Series OSP-L STL

Note on Types D1ST  
The mid-section support can also be mounted on the underside of the actuator, in which case its distance from the centre of the actuator is different.

Dimension Table (mm) Mid-Section Support D1ST

For Series OSP-L..	Mounting Type	R	AF	DE	DH	DL	DO	DP	DT	EM	EQ	Order No.
STL25	D1ST	M5	22	16	38	13	36	50	10	28.5	36	21126FIL
STL32	D1ST	M5	30	16	46	13	36	60	10	35.5	43	21127FIL
STL40	D1ST	M6	38	23	61	19	45	60	11	38	48	21128FIL
STL50	D1ST											in progress


Order example: Type D1ST25      Order No. 21126FIL



Series OSP-L STL25 to STL50: Type E1ST

Installation:  
Top carrier  
Side position

Mounting from above / below using a cap screw

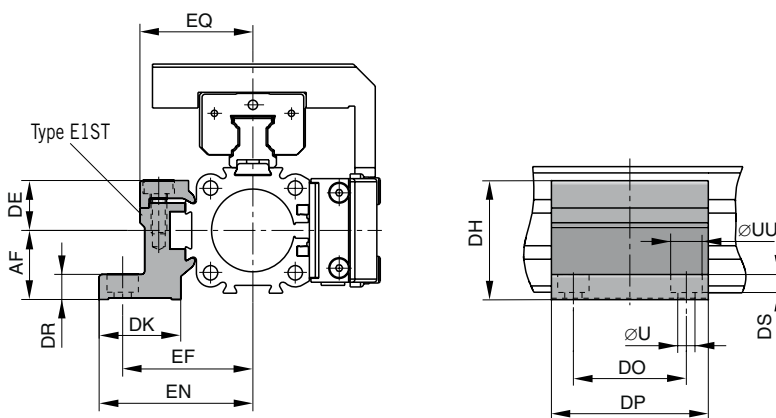

# Mid-Section Support

## Type: E1ST to E5ST

for Linear Drives with Recirculating Ball Bearing Guide

- Series OSP-L STL



The right to introduce technical modifications is reserved

# Mid-Section Support Type: E1ST to E5ST


for Linear Drives with  
Recirculating Ball Bearing Guide

- Series OSP-L STL

## Series OSP-L STL25 to STL50: Type E3ST, E4ST, E5ST

Installation:  
Side carrier  
Piston below


Mounting from above / below  
using a cap screw

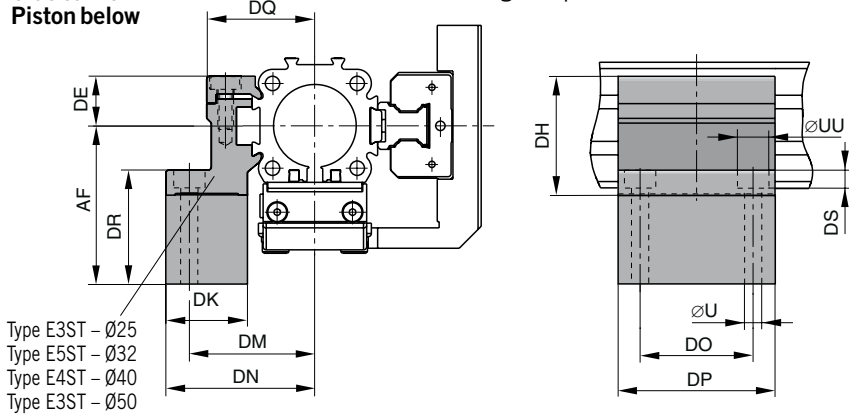

## Series OSP-L STL25 to STL50: Type E2ST

Installation:  
Side carrier  
Top piston

Mounting from above / below  
using a cap screw

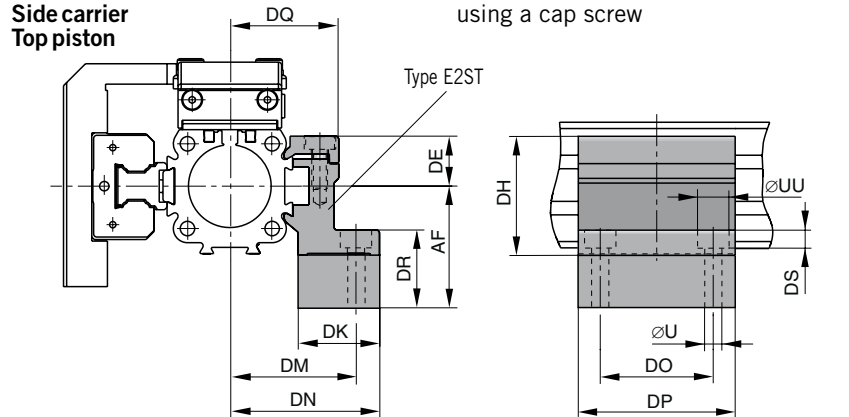

Dimension Table (mm) for Mid-Section Support E1ST to E5ST


For Series OSP-L-...	Mounting Type	ØU	ØUU	AF	DE	DH	DK	DM	DN	DO	DP	DR	DQ	DS	EF	EN	EQ	Order No.	
STL25	E1ST	5.5	10	22	16	38	26	40	47.5	36	50	8	34.5	5.7	41.5	49	36	21131FIL	
STL25	E2ST	5.5	10	37	16	38	26	40	47.5	36	50	23	34.5	5.7	41.5	49	36	21143FIL	
STL25	E3ST	5.5	10	49	16	38	26	40	47.5	36	50	35	34.5	5.7	41.5	49	36	21148FIL	
STL32	E1ST	5.5	10	30	16	46	27	46	54.5	36	60	10	40.5	5.7	48.5	57	43	21132FIL	
STL32	E2ST	5.5	10	44	16	46	27	46	54.5	36	60	24	40.5	5.7	48.5	57	43	21144FIL	
STL32	E5ST	5.5	10	65	16	46	27	46	54.5	36	60	45	40.5	5.7	48.5	57	43	21151FIL	
STL40	E1ST	7	-	38	23	61	34	53	60	45	60	10	45	-	56	63	48	21133FIL	
STL40	E2ST	7	-	51	23	61	34	53	60	45	60	23	45	-	56	63	48	21145FIL	
STL40	E4ST	7	-	70	23	61	34	53	60	45	60	42	45	-	56	63	48	21150FIL	
STL50																			
STL50																			in progress
STL50																			

Order sample: Type E1ST25


Order No. 21131FIL



Series OSP-L25 to L32

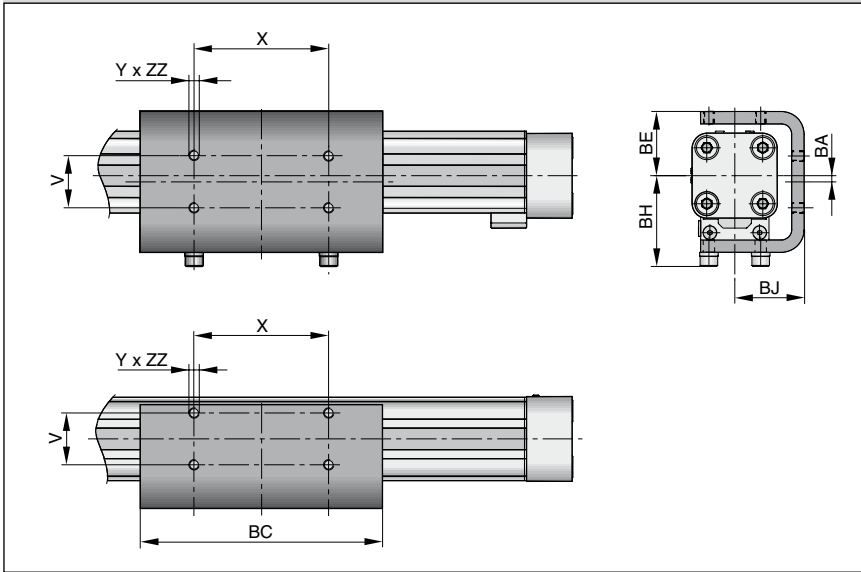

Series OSP-L40 to L63

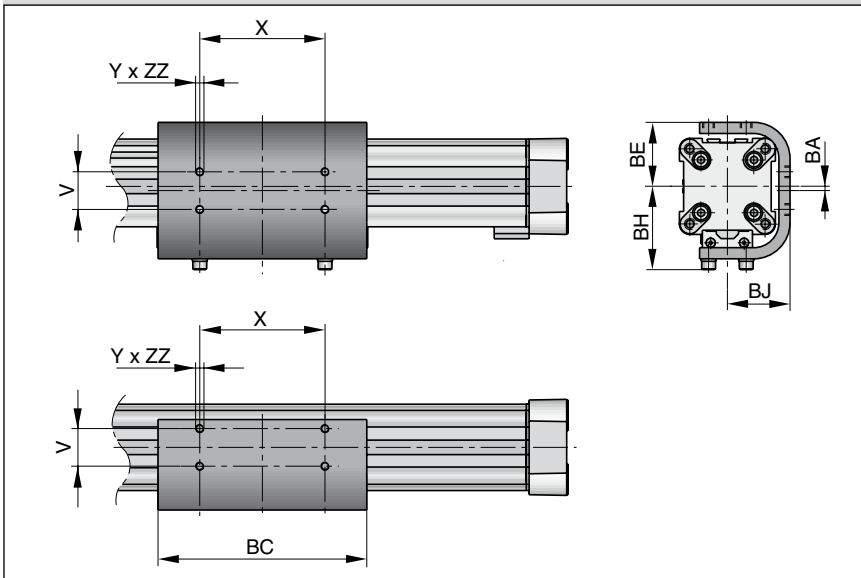

Dimension Table (mm)

For series	V	X	Y	BA	BC	BE	BH	BJ	ZZ	Order No.
OSP-L25	25	65	M5	3	117	31	44	33.5	6	20037FIL
OSP-L32	27	90	M6	3	150	38	52	39.5	6	20161FIL
OSP-L40	27	90	M6	3	150	46	60	45	8	20039FIL
OSP-L50					in progress					
OSP-L63					in progress					

**NOTE:**  
Order instructions in combination with basic cylinder see page 19, pos. 20

# Linear Drive Accessories

∅ 25-63 mm  
Inversion Mounting



For Linear-drive  
• Series OSP-L

In dirty environments, or where there are special space problems, inversion of the cylinder is recommended. The inversion bracket transfers the driving force to the opposite side of the cylinder. The size and position of the mounting holes are the same as on the standard cylinder.

Stainless steel version on demand.

**Please note:**  
Other components of the OSP-L system such as **mid-section supports**, **magnetic switches** can still be mounted on the free side of the cylinder.

**IMPORTANT NOTE:**  
May be used in combination with **Clevis Mounting**, ref. dimensions at page 37.



# Linear Drive Accessories

## ∅ 25-50 mm Adaptor Profile




For Linear-drive  
• Series OSP-L

### Adaptor Profile OSP-L

- A universal attachment for mounting of valves etc.
- Solid material




### Series OSP-L25 to L50

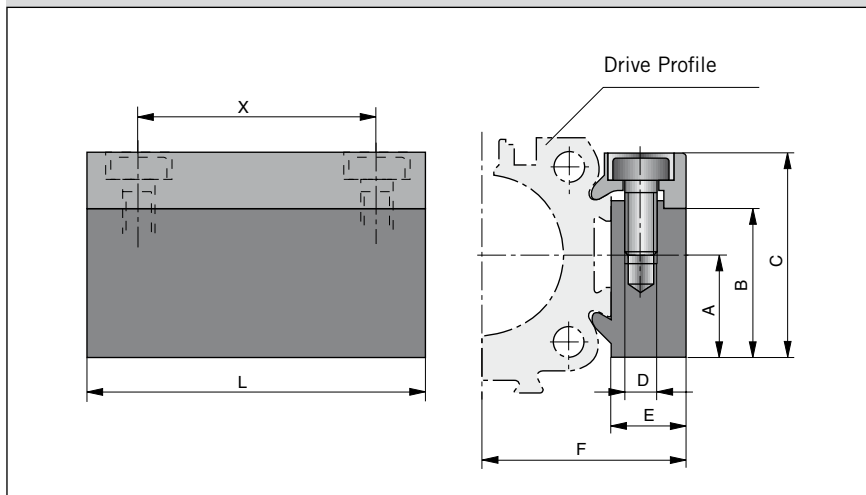

### Dimension Table (mm)

For series	A	B	C	D	E	F	L	X	Order No.	
									Standard	Stainless
OSP-L25	16	23	32	M5	10.5	30.5	50	36	20006FIL	20186FIL
OSP-L32	16	23	32	M5	10.5	36.5	50	36	20006FIL	20186FIL
OSP-L40	20	33	43	M6	14	45	80	65	20025FIL	20267FIL
OSP-L50					in progress					

### Series OSP-L63

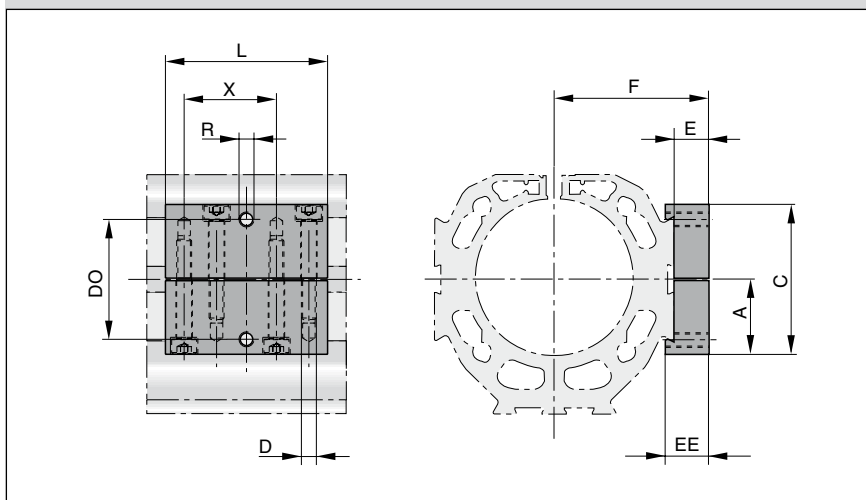


### Dimension Table (mm)

For series	A	C	D	E	F	L	R	X	EE	DO	Order No.*
OSP-L63											

\* Stainless version



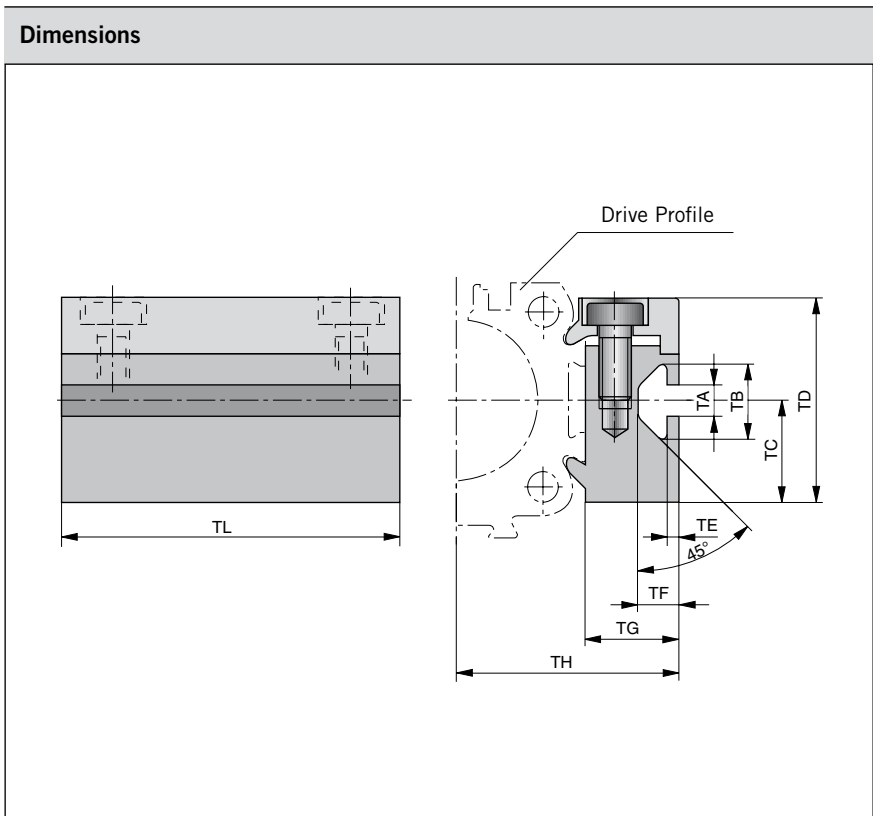

# Linear Drive Accessories

## ∅ 25-50 mm

### T-Slot Profile



For Linear-drive  
• Series OSP-L

#### T-Slot Profile OSP-L

- A universal attachment for mounting with standard T-Nuts

Dimension Table (mm)											
For Series	TA	TB	TC	TD	TE	TF	TG	TH	TL	Order No.	
										Standard	Stainless
OSP-L25	5	11.5	16	32	1.8	6.4	14.5	34.5	50	20007FIL	20187FIL
OSP-L32	5	11.5	16	32	1.8	6.4	14.5	40.5	50	20007FIL	20187FIL
OSP-L40	8.2	20	20	43	4.5	12.3	20	51	80	20026FIL	20268FIL
OSP-L50	in progress										

Following T-nuts from the company ITEM could be used:

For Series	T-nut St 5	T-nut St 8
OSP-L25-L32	●	
OSP-L40-L50		●




# Linear Drive Accessories

## ∅ 25-50 mm Connection Profile



- For combining
- Series OSP-L with system profiles
  - Series OSP-L with Series OSP-L

### Dimensions

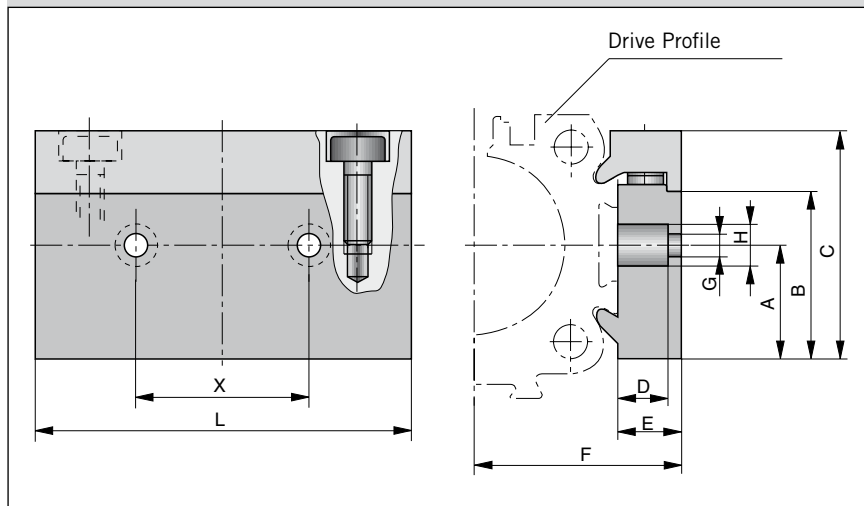


### Dimension Table (mm)


For series on the carrier of	for mounting	A	B	C	D	E	F	G	H	L	X	Order No.
OSP-L25	OSP32-50	16	23	32	8.5	10.5	30.5	6.6	11	60	27	20850 FIL
OSP-L32	OSP32-50	16	23	32	8.5	10.5	36.5	6.6	11	60	27	20850FIL
OSP-L40	OSP32-50	20	33	43	8	14	45	6.6	11	60	27	20851FIL
OSP-L50	OSP32-50						in progress					

### Possible Combinations


Combination of Series OSP-L with system profiles

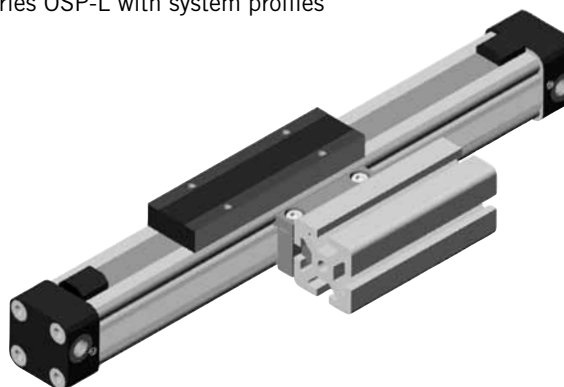

Combination of Series OSP-L with Series OSP-L

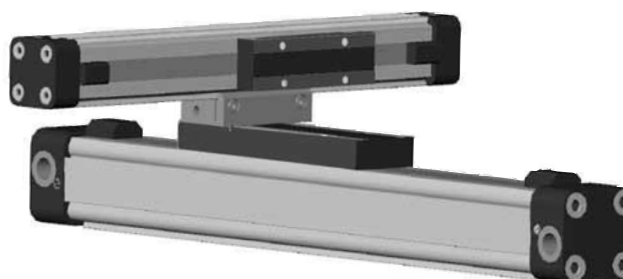

## Dimensions

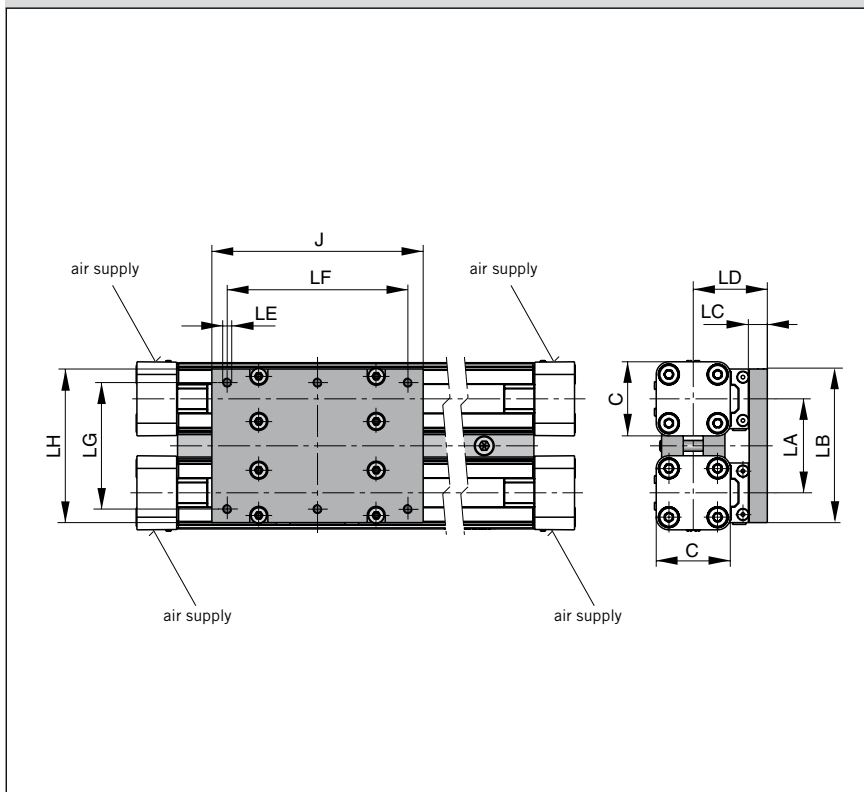

# Linear Drive Accessories

## ∅ 25-50 mm

### Duplex Connection

**OSP**  
— ORIGA  
— SYSTEM  
— PLUS

For connection of cylinders of the Series OSP-L

The duplex connection combines two OSP-L cylinders of the same size into a compact unit with high performance.

## Dimension Table (mm)


For series	C	J	LA	LB	LC	LD	LE	LF	LG	LH	Order No.	
											Standard	Stainless
OSP-L25	41	117	52	86	10	41	M5	100	70	85	20153FIL	20194FIL
OSP-L32	52	152	64	101	12	50	M6	130	80	100	20290FIL	20291FIL
OSP-L40	69	152	74	111	12	56	M6	130	90	110	20156FIL	20276FIL
OSP-L50	in progress											

## Features

- increased load and torque capacity
- higher driving forces

## Included in delivery:

- 2 clamping profiles with screws
- 1 mounting plate with fixings

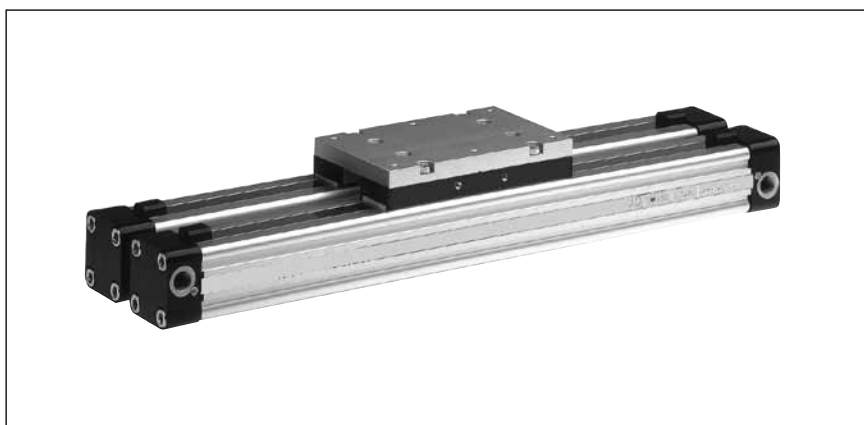

## NOTE:

Order instructions in combination with basic cylinder see page 19, pos. 20



# Linear Drive Accessories

∅ 25-50 mm  
Multiplex Connection



**For connection of cylinders of the Series OSP-L**

The multiplex connection combines two or more OSP-L cylinders of the same size into one unit.

**Features**


- The orientation of the carriers can be freely selected

**Included in delivery:**


2 clamping profiles with clamping screws

### Dimensions

Installation:  
Top carrier/Top carrier

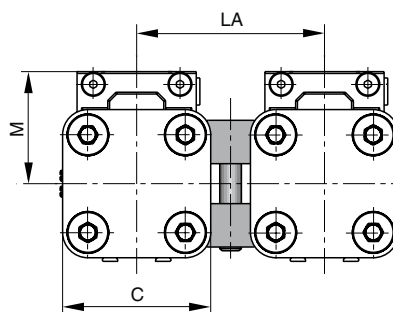


Installation:  
Top carrier/Side carrier

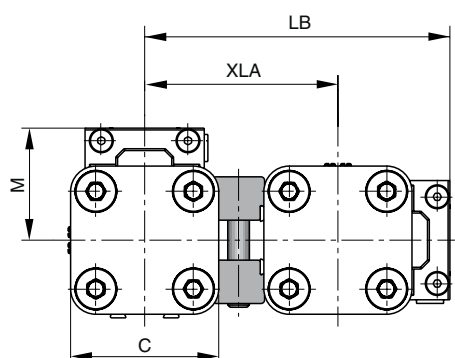

### Dimension Table (mm)

For series	C	M	LA	LB	XLA	Order No.	
						Standard	Stainless
OSP-L25	41	31	52	84.5	53.5	20035FIL	20193FIL
OSP-L32	52	38	64	104.5	66.5	20167FIL	20265FIL
OSP-L40	69	44	74	121.5	77.5	20036FIL	20275FIL
OSP-L50	in progress						

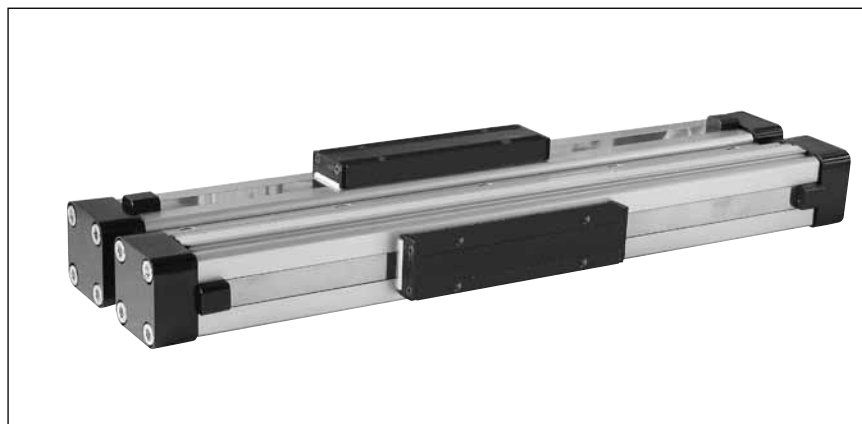

Characteristics			
Characteristics	Unit	Description	
<b>Electrical Characteristics</b>		<b>Type RS</b>	<b>Type ES</b>
Switching output		Reed	PNP, NPN
Operating voltage	V	10-240 AC/DC (NO) 10-150 AC/DC (NC)	10-30 DC
Residual voltage	V	< 3	< 3
Connection		Two wire	Three wire
Output function		normally open normally closed	normally open
Permanent current	mA	200	200
Max. switching capacity	VA (W)	10 VA	—
Power consumption without load	mA	—	< 20
Function indicator		LED, yellow	
Typical switching time	ms	On: < 2	On: < 2
Switch-off delay	ms	—	ca. 25
Pole reversal does not work		LED	—
Pole reversal protection		—	Built in
Short-circuit protection		—	Built in
Switchable capacity load	µF	0.1 at 100 Ω, 24 VDC	
Switching point accuracy	mm	± 0,2	
Switching distance	mm	ca. 15	ca. 15
Hysteresis for OSP	mm	ca. 8	ca. 3
Lifetime		3 x 10 <sup>6</sup> , up to 6 x 10 <sup>6</sup> cycles	Theoretically unlimited
<b>Mechanical Characteristics</b>			
Housing		Makrolon, smoke color	
Cable cross section	mm <sup>2</sup>	2 x 0.14	3 x 0.14
Cable type *)		PVC	PUR, black
Bending radius fixed	mm	≥ 20	
moving	mm	≥ 70	
Weight (Mass)	kg	0.012	
Degree of protection	IP	67 to DIN EN 60529	
Ambient temperature range *) <sup>1)</sup>	°C °C	-25 other temperature ranges +80 on request	
Shock resistance	m/s <sup>2</sup>	100 (contact switches)	500

\*) other versions on request

<sup>1)</sup> for the magnetic switch temperature range, please take into account the surface temperature and the self-heating properties of the linear drive.

# Linear Drive Accessories

## ∅ 25-63 mm Magnetic Switches



For electrical sensing of the carrier position, e.g. at the end positions, magnetic switches may be fitted. Position sensing is contactless and is based on magnets fitted as standard to the carrier. A yellow LED indicates operating status.

**Piston, speed and switching distance affect signal duration and should be considered in conjunction with the minimum reaction time of ancillary control equipment.**

$$\text{Min. reaction time} = \frac{\text{Switching distance}}{\text{Piston speed}}$$



## Type RS

In the type RS contact is made by a mechanical **reed switch** encapsulated in glass.  
Direct connection with 2-pole cable, 5 m long, open ended (**Type RS-K**).

## Type ES

In the type ES contact is made by an **electronic switch** – without bounce or wear and protected from pole reversal. The output is short circuit proof and insensitive to shocks and vibrations. Connection is by 3-pole connector for easy disconnection. Fitted with connection cable 100 mm long with connector.  
A 5 m cable with connector and open end can be ordered separately, or use the Order No. for the complete Type ES with 5 m cable.

## Magnetic Switches RS and ES

### Electrical Service Life Protective Measures

Magnetic switches are sensitive to excessive currents and inductions. With high switching frequencies and inductive loads such as relays, solenoid valves or lifting magnets, service life will be greatly reduced.


With **resistive and capacitive loads** with high switch-on current, such as light bulbs, a protective resistor should be fitted. This also applies to long cable lengths and voltages over 100 V.

In the switching of inductive loads such as relays, solenoid valves and

lifting magnets, voltage peaks (transients) are generated which must be suppressed by protective diodes, RC loops or varistors.

### Connection Examples


Load with protective circuits  
(a) Protective resistor for light bulb  
(b) Freewheel diode on inductivity  
(c) Varistor on inductivity  
(d) RC element on inductivity

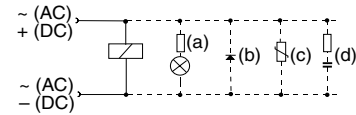


For the type ES, external protective circuits are not normally needed.

### Electrical Connection: Cable Type RS


#### Normally closed (NC)



#### Normally open (NO)




### Dimensions (mm): Cable Type RS-K

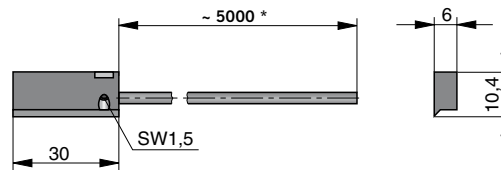


\* Length with possible minus tolerance, see chart below

### Electrical Connection: Connector Type ES


#### Standard Version: Type PNP

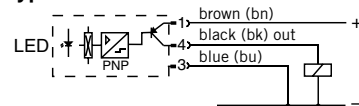

#### Optional Version Type NPN

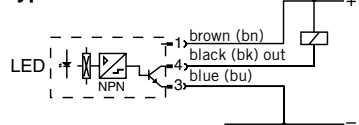

### Dimensions (mm): Connector Type ES-S

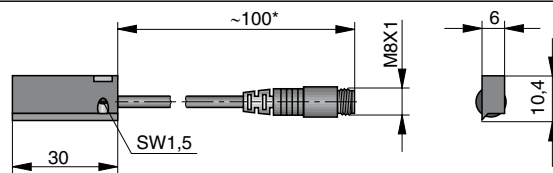


\* Length with possible minus tolerance, see chart below

### Length of connection cable with length tolerance

Magnetic Switch Order No.	Nominal cable length	Length tolerance
KL3045FIL	5000 mm	-50 mm
KL3048	5000 mm	-50 mm
KL3054FIL	100 mm	-20 mm
KL3060FIL	145 mm	±5 mm



**Dimensions Series OSP-L25 to L63**

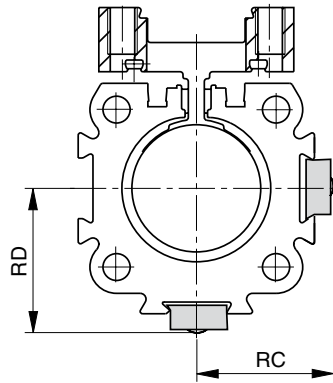

Serie	Dimensions [mm]	
	RC	RD
OSP-L25	25	27
OSP-L32	31	34
OSP-L40	36	39
OSP-L50	in progress	
OSP-L63		

**Order Instructions**

Series	Order No.					
	RS Closer Normaly open	RS Opener Normaly closed	ES		ES complete with 5 m cable	
			PNP	NPN	PNP	NPN
OSP-L25 up to OSP-L63	Type: RS-K KL3045FIL	Type: RS-K KL3048	Type: ES-S KL3054FIL	Type: ES-S KL3060FIL	Type: ES-S 10750FIL	Type: ES-S 10751FIL
Cable 5 m with connector and with open end for magnetic switches Type ES-S			4041FIL			


# Linear Drive Accessories

∅ 25-63 mm  
Cable Cover

For clean guidance of magnetic switch cables along the cylinder body.  
Contains a maximum of 3 cables with diameter 3 mm.


Material: Plastic  
Colour: Red  
Temperature Range: -10 to +80°C

Dimensions (mm)

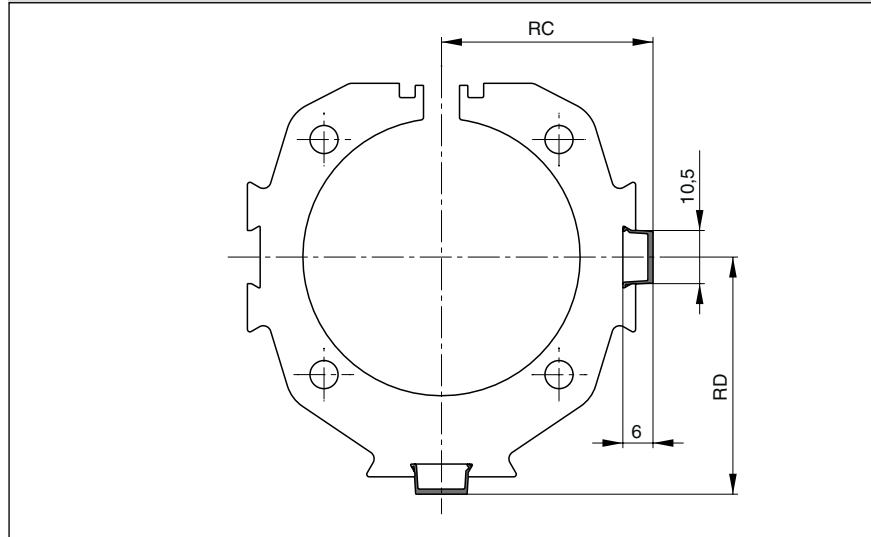

Dimension Table (mm) and Order Instructions

Series	Dimensions (mm)		Order No.
	RC	RD	
OSP-L25	23.5	25.5	<b>13039FIL</b> Minimal length: 1 m Max. profile length: 2 m Multiple profiles can be used.
OSP-L32	29.5	32	
OSP-L40	34.5	37.5	
OSP-L50	in progress		
OSP-L63	in progress		

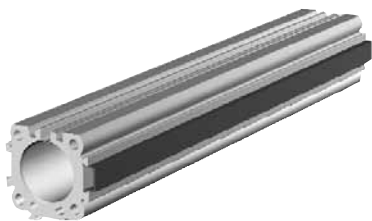

Characteristics		Series P8S-GR P8S-GE	Series P8S-GP
Characteristics	Unit	Description	
<b>Electrical Characteristics</b>			
Switching output / -function		Reed / NO Reed / NC	PNP / NO
Electrical configuration		2-wire	3-wire
Display LED yellow		yes (not Reed NC)	
Operating voltage Ub	V	10 - 30 AC/DC	10 - 30 DC
Ripple of Ub	%	≤10	≤10
Voltage drop	V	≤3	≤2
Power consumption @ Ub = 24 V switched on, without load	mA	-	≤10
Permanent current	mA	≤500	≤200
Breaking capacity	W	≤6	-
Switchable capacity load @ 100 W @ 24 VDC	nF	100	-
Switching frequency	Hz	≤400	≤1,000
Time delay before availability (on/off)	ms	1.5/0.5	0.5/0.5
Repeatability	mm	≤0.2	≤0.2
Switching distance	mm	approx. 15	approx. 15
Hysteresis	mm	2	2
EMC following EN 60947-5-2		yes	yes
Lifetime		≥20 x 10 <sup>6</sup> cycles	unlimited
Short-circuit protection		-	yes
Reverse polarity prot.		-	yes
Power-up pulse suppression		-	yes
Protection for inductive load		-	yes
ATEX -Certification		-	on request
<b>Mechanical Characteristics</b>			
Housing		PA12	
Cable type		PUR / black	
Cable cross section	mm <sup>2</sup>	2 x 0.14	3 x 0.14
Bending radius fixed	mm	≥ 30	
Bending radius moving	mm	≥ 45	
<b>Ambient</b>			
Protection class to EN 60529	IP	68	
Ambient temperature range <sup>1)</sup>	°C	- 30 to + 80	
Vibration to EN 60068-2-6	G	30, 11 ms, 10 to 55 Hz, 1 mm	
Shock to EN 60068-2-27	G	50, 11 ms	

<sup>1)</sup> for the magnetic switch temperature range, please take into account the surface temperature and the self-heating properties of the linear drive.

# Linear Drive Accessories Ø 25 – 63 mm Magnetic Switches



Typ **RST**  
**EST**

The next generation of T-slot switches is appealing due to its ease of attachment without the use of special tools. Due to the new electronics, the hysteresis is especially narrow, allowing for a highly accurate switching point.

Magnetic switches are used for electrical sensing of the position of the piston, e.g. at its end positions. They can also be used for sensing of intermediate positions.

Sensing is contactless, based on magnets which are built-in as standard. A yellow LED indicates operating status.

The magnetic switches are attached with an adapter directly in the dovetail groove of the OSP cylinder.

**The possible operating speed of the load carrier or carrier bolt must account for the minimum response time of downstream devices. Accordingly, the switching distance is included in the calculation.**

$$\text{Minimum response time} = \frac{\text{Switching distance}}{\text{Overrun speed}}$$



## Type RST

In the type RST contact is made by a mechanical **reed switch** encapsulated in glass.

## Type EST

In the type EST contact is made by an **electronic switch** – without bounce or wear and protected from pole reversal. The output is short circuit proof and insensitive to shocks and vibrations.

A cable with connector and open end can be ordered separately.

## Magnetic Switches RST and EST

### Electrical Service Life, Protective Measures


Magnetic switches are sensitive to excessive currents and inductions. With high switching frequencies and inductive loads such as relays, solenoid valves or lifting magnets, service life will be greatly reduced.

With **resistive and capacitive loads** with high switch-on current, such as light bulbs, a protective resistor should be fitted. This also applies to long cable lengths.

In the switching of inductive loads such as relays, solenoid valves and lifting magnets, voltage peaks (transients) are generated which must be suppressed by protective diodes, RC loops or varistors.

### Connection Examples

Load with protective circuits  
 (a) Protective resistor for light bulb  
 (b) Freewheel diode on inductivity  
 (c) Varistor on inductivity  
 (d) RC element on inductivity

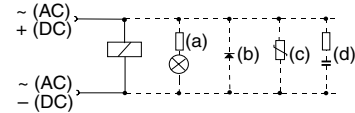

For the type EST, external protective circuits are not normally needed.

Electrical Connection: Cable Type RST-K	Electrical Connection: Cable Type EST-K	Electrical Connection: Connector Type RST-S
<p>Reed 2-wire</p> <p><b>Normally open</b></p> <p><b>Normally closed</b></p>	<p>PNP 3-wire</p> <p><b>Normally open</b></p>	<p>Reed 2-wire</p> <p><b>Type EST-S</b></p> <p>PNP 3-wire</p>

### Dimensions (mm) - Typ RST-K, EST-K - Series P8S

Allen key- (1,5) / Slotted screw

Ø2.9

9,7

Switching point

LED function display

31,5

6,1

4,6

4 (out)

3(-)

PIN assignment (view of pins) to DIN EN 50044

P8S- cable with open end

3 m / 10 m

42

P8S- with M8 Snap in connector

0,3 m

36


M8x1

P8S- with M8 screw connector

0,3 m


37

**Installation instructions for the RST/EST magnetic switches series P8S**

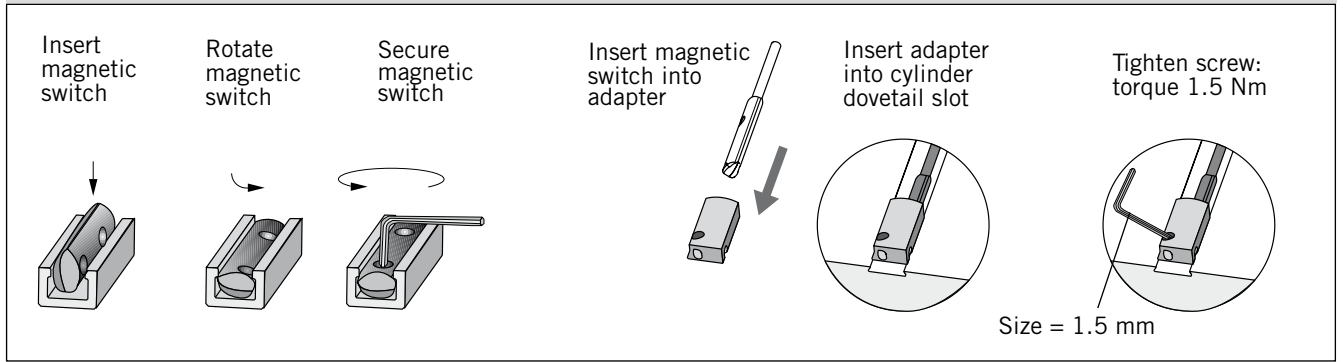

**Dimensions adapters for RST/EST magnetic switch series P8S**

**for OSP-L25 - L63**

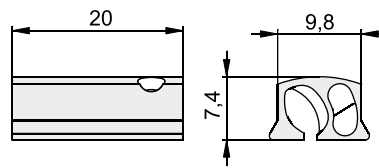

<b>Order Instructions</b>			
Version	Voltage	Type	Order No.
Magnetic switch, reed contact, normally open, LED indicator, cable 3 m	10-30 V AC / DC	RST-K	P8S-GRFAX
Magnetic switch, reed contact, normally open, LED indicator, cable 10 m	10-30 V AC / DC	RST-K	P8S-GRFDX
Magnetic switch, reed contact, normally open, snap connector M8, LED indicator cable 0.3 m	10-30 V AC / DC	RST-S	P8S-GRSHX
Magnetic switch, reed contact, normally open, screw connector M8, LED indicator cable 0.3 m	10-30 V AC / DC	RST-S	P8S-GRCHX
Magnetic switch, reed contact, normally closed, cable 10 m	10-30 V AC / DC	RST-K	P8S-GEFRX
Magnetic switch, electronic, PNP LED indicator cable 3 m	10-30 V DC	EST-K	P8S-GPFAX
Magnetic switch, electronic, PNP LED indicator cable 10 m	10-30 V DC	EST-K	P8S-GPFDX
Magnetic switch, electronic, PNP snap connector M8, LED indicator cable 0.3 m	10-30 V DC	EST-S	P8S-GPSHX
Magnetic switch, electronic, PNP screw connector M8, LED indicator cable 0.3 m	10-30 V DC	EST-S	P8S-GPCHX

**Included in delivery:** 1 magnetic switch, 1 adapter for T-slot magnetic switch for type OSP-L25 – 63.

<b>Accessories</b>		
Description	Type	Order No.
Cable M8, 2.5 m without lock nut	KS 25	KY 3240
Cable M8, 5.0 m without lock nut	KS 50	KY 3241
Cable M8, 10.0 m without lock nut	KS 100	KC 3140
Cable M8, 2.5 m with lock nut	KSG 25	KC 3102
Cable M8, 5.0 m with lock nut	KSG 50	KC 3104
Adapter for RST/EST magnetic switch – for type OSP-L25 – L63 (pack of 10)		KL 3333



**Total Overview of Options (not all of them can be combined ! )**

<b>1-4</b>	5+6	7	8	9	10	11	12-16	
<b>OSPL</b>	25	0	0	0	0	0	01100	

Piston-Ø	Version / Piston	Air Connection	Seals	Lubrication	Screws	Stroke
<b>25</b>	<b>0</b> standard	<b>0</b> standard	<b>0</b> standard	<b>0</b> standard	<b>0</b> standard	in mm (5 digits)
<b>32</b>	<b>1</b> Tandem	<b>1</b> end face			<b>1</b> stainless	
<b>40</b>		<b>2</b> both at one end				
in progress		<b>3</b> left standard right end face				
in progress		<b>4</b> right standard left end face				
		<b>A</b> 3/2 way valve VOE 24V= Ø 25,32,40,50				
		<b>B</b> 3/2 way valve VOE 230 ~/ 110V= Ø 25,32,40,50				
		<b>C</b> 3/2 way valve VOE 48V= Ø 25,32,40,50				
		<b>E</b> 3/2 way valve VOE 110V~ Ø 25,32,40,50				

The right to introduce technical modifications is reserved



	17	18	19	20	21	22	23	24	25
	0	0	0	0	0	0	0	0	0

End cap position	
0	L+R 0° = in front
1	L+R 90° = underneath
2	L+R 180° = at the back
3	L+R 270° = same side as outerband
4	L 90° = underneath R 0° = in front
5	L 180° = at the back R 0° = in front
6	L 270° = same side as outerband R 0° = in front
7	L 0° = in front R 90° = underneath
8	L 180° = at the back R 90° = underneath
9	L 270° = same side as outerband R 90° = underneath
A	L 0° = in front R 180° = at the back
B	L 90° = underneath R 180° = at the back
C	L 270° = same side as outerband R 180° = at the back
D	L 0° = in front R 270° = same side as outerband
E	L 90° = underneath R 270° = same side as outerband
F	L 180° = at the back R 270° = same side as outerband

Cushioning	
0	standard
1	max. length
2	variable stop complete VS soft left only for Starline
3	variable stop complete VS hard left only for Starline
4	variable stop complete VS soft right only for Starline
5	variable stop complete VS hard right only for Starline
6	variable stop complete VS soft both sides only for Starline
7	variable stop complete VS hard both sides only for Starline

Piston Mounting	
0	without
1	Clevis mounting

Guides/ Brakes/ Inversion	
0	without
2	Slideline SLXX
B	Starline STLXX
M	Inversion
N	Duplex

add. Guide Carriage	
0	without
2	Guide Carriage Slideline SLXX
B	Guide Carriage Starline STLXX

Cover / Cable Channel	
0	standard
1	Cablechannel
2	Cable channel two-sided

Measuring system	
0	without



## Information on application

The contents of this catalog are not binding and are only intended for informational purposes and are not to be considered as offer with legal effect. A written confirmation of order from Parker Hannifin is authoritative for the conclusion of a contract; this confirmation is given solely under the respective currently applicable Parker Hannifin General Terms of Sale and Delivery. These are included in our price list and in the Internet at [www.parker-origa.com](http://www.parker-origa.com).

All the products presented in this catalog are purely for commercial use. None of the information or contents is appropriate for private consumers. Private consumers cannot place orders based on the information in the catalog. Please contact Parker Hannifin for further information.

All the products listed in this catalog are designed for typical pneumatic applications which e.g. are installed in higher-level machines. The recognized technical rules for safe and expert work are to be observed for the use and installation of pneumatic products. The precondition for the use of the products is, unless stated otherwise, correctly prepared compressed air free from aggressive media. Furthermore, the respective regulations of the legislator, the TÜV (Technical Inspection Association), the respective professional associations or the VDE (Association of Electrical, Electronic and Information Technologies) provisions also apply.

The technical data stated in this catalog is to be observed by the user. The data stated may not be exceeded nor fallen short of. If such data is not stated then it may be assumed that there are no such upper or lower limits or restrictions for particular applications. In the case of unusual physical or chemical applications, consultation and clearances are to be obtained from Parker Hannifin.

Unless otherwise agreed in individual cases, the customer or end consumer is responsible for the disposal of the ORIGA products. Disposal by Parker Hannifin is not included in the price and this would have to be taken into account in the event of any applicable return to and disposal by Parker Hannifin.

### Technical data and representations

The technical data and illustrations have been compiled with great care and to the best of our knowledge. We cannot assume any guarantee for the up-to-dateness, correctness and completeness of the information.

The data and information such as illustrations, drawings, descriptions, dimensions, weights, materials, technical and other performances as well as the products and services described in general product descriptions, Parker Hannifin catalogs, brochures and price lists of any type are subject to change and may be modified or updated at any time without prior announcement by Parker Hannifin. They are only binding in so far as the contract or confirmation of order expressly refers to them. Slight deviations from such product descriptions are deemed as approved and do not affect the fulfillment of contracts in so far as these are considered acceptable to customers.

This catalog does not contain any guarantees, assured characteristics or agreements on condition by Parker Hannifin for the products represented, neither expressly nor implicitly, nor with regard to the availability of the products. Advertising statements regarding quality characteristics, properties or applications of Hannifin products are without legal obligation.

As far as legally permissible, any liability is excluded on the part of Parker Hannifin for direct or indirect damage, consequential damage, claims of any type and on any legal basis arising from the use of the information contained in this catalog.

### Trademarks, copyright and reproduction

The representation of industrial rights such as brands, logos, registered trademarks or patents in this catalog does not include the granting of licenses or rights of use. The use of these is not permitted without the express consent of Parker Hannifin. The entire contents of this catalog are the intellectual property of Parker Hannifin. Within the meaning of copyright, any unlawful use of intellectual property, even extracts, is prohibited. Reprinting, reproduction and translation (even extracts) are only permitted with the prior written consent of Parker Hannifin.

## Importance of EU Directives

Various Directives have been issued by the EU Commission in the course of the unification of the single European market; the following Directives are in part of significance for ORIGA products:

- Simple pressure vessels (87/404/EWG, amended by 90/488/EWG and 93/68/EWG)
- Low-voltage electrical equipment (73/23/EWG, amended by 93/68/EWG)
- Machinery Directive (89/392/EWG, amended by 91/368/EWG, 93/44/EWG and 98/37/EG)
- Pressure Equipment Directive (97/23/EWG)
- Equipment and protective systems intended for use in potentially explosive atmospheres (ATEX Directive, 94/9/EG)
- Electromagnetic Compatibility Directive (EMV Directive, 89/336/EWG, amended by 92/31/EWG)

If a product comes within the scope of application of one of these Guidelines, then an EU Declaration of Conformity with CE mark (CE for Communauté Européenne) is required. This CE marking does not represent a quality feature but verifies that the conformity assessment procedure specified has been concluded successfully and the protective requirements of the relevant EU Directives have been observed.

Products which do not come under any of the above mentioned Directives may not bear the CE mark nor may any manufacturer's declaration according to the EU Machinery Directive or Declaration of Conformity be issued for these products.

If a product may not be CE marked according to the Machinery Directive, it must however be marked if it comes within the scope of application of any other Directive.

The following harmonized standards are applied in the design of ORIGA components and systems:

- DIN EN ISO 12100 Safety of machinery
- DIN EN 60204.1 Electrical equipment of machines
- DIN EN 983 Safety requirements for fluid power systems and their components

### The following Directives are of particular significance to Parker Hannifin:

- ORIGA products in potentially explosive atmospheres, to which the above mentioned ATEX Directive applies, are treated according to the Directive and CE and EX marked.
- According to the Machinery Directive, ORIGA products are mainly components for installation in machines and therefore do not require an EU Declaration of Conformity with CE mark. Parker Hannifin issues a manufacturer's declaration according to the Machinery Directive for these components. This declaration corresponds to a great extent to the Declaration of Conformity with the comment that commissioning is only permitted if the machine or system conforms to the Directives. This manufacturer's declaration impacts neither our product liability based on the product liability law nor warranty assurances according to our General Terms of Sale and Delivery. Neither does the manufacturer's declaration affect our quality assurance measures according to our Quality Management Manual nor our quality certification according to ISO 9001.
- According to the Pressure Equipment Directive, ORIGA products are components of low hazard potential, thus most of the products do not come under this Directive. The exceptions to this are maintenance equipment from a certain pressure/volume level onwards. These components are treated according to the Directive if required and bear the CE mark.

### ORIGA products are excluded from the following EU Guidelines:

- End-of-life vehicles (2000/53/EG).
- Waste Electronic and Electrical equipment (WEEE, 2002/96/EG) and Restriction on Hazardous Substances (RoHS, 2002/95/EG).
- Pressure Equipment Directive (97/23/EWG) with the above mentioned exceptions.

# Parker Worldwide

## Europe, Middle East, Africa

**AE – United Arab Emirates,**  
Dubai

Tel: +971 4 8127100  
parker.me@parker.com

**AT – Austria,** Wiener Neustadt

Tel: +43 (0)2622 23501-0  
parker.austria@parker.com

**AT – Eastern Europe,** Wiener  
Neustadt

Tel: +43 (0)2622 23501 900  
parker.easteurope@parker.com

**AZ – Azerbaijan,** Baku

Tel: +994 50 2233 458  
parker.azerbaijan@parker.com

**BE/LU – Belgium,** Nivelles

Tel: +32 (0)67 280 900  
parker.belgium@parker.com

**BY – Belarus,** Minsk

Tel: +375 17 209 9399  
parker.belarus@parker.com

**CH – Switzerland,** Etoy

Tel: +41 (0)21 821 87 00  
parker.switzerland@parker.com

**CZ – Czech Republic,** Klecany

Tel: +420 284 083 111  
parker.czechrepublic@parker.com

**DE – Germany,** Kaarst

Tel: +49 (0)2131 4016 0  
parker.germany@parker.com

**DK – Denmark,** Ballerup

Tel: +45 43 56 04 00  
parker.denmark@parker.com

**ES – Spain,** Madrid

Tel: +34 902 330 001  
parker.spain@parker.com

**FI – Finland,** Vantaa

Tel: +358 (0)20 753 2500  
parker.finland@parker.com

**FR – France,** Contamine s/Arve

Tel: +33 (0)4 50 25 80 25  
parker.france@parker.com

**GR – Greece,** Athens

Tel: +30 210 933 6450  
parker.greece@parker.com

**HU – Hungary,** Budapest

Tel: +36 23 885 470  
parker.hungary@parker.com

**IE – Ireland,** Dublin

Tel: +353 (0)1 466 6370  
parker.ireland@parker.com

**IT – Italy,** Corsico (MI)

Tel: +39 02 45 19 21  
parker.italy@parker.com

**KZ – Kazakhstan,** Almaty

Tel: +7 7272 505 800  
parker.easteurope@parker.com

**NL – The Netherlands,** Oldenzaal

Tel: +31 (0)541 585 000  
parker.nl@parker.com

**NO – Norway,** Asker

Tel: +47 66 75 34 00  
parker.norway@parker.com

**PL – Poland,** Warsaw

Tel: +48 (0)22 573 24 00  
parker.poland@parker.com

**PT – Portugal,** Leca da Palmeira

Tel: +351 22 999 7360  
parker.portugal@parker.com

**RO – Romania,** Bucharest

Tel: +40 21 252 1382  
parker.romania@parker.com

**RU – Russia,** Moscow

Tel: +7 495 645-2156  
parker.russia@parker.com

**SE – Sweden,** Spånga

Tel: +46 (0)8 59 79 50 00  
parker.sweden@parker.com

**SK – Slovakia,** Banská Bystrica

Tel: +421 484 162 252  
parker.slovakia@parker.com

**SL – Slovenia,** Novo Mesto

Tel: +386 7 337 6650  
parker.slovenia@parker.com

**TR – Turkey,** Istanbul

Tel: +90 216 4997081  
parker.turkey@parker.com

**UA – Ukraine,** Kiev

Tel: +380 44 494 2731  
parker.ukraine@parker.com

**UK – United Kingdom,** Warwick

Tel: +44 (0)1926 317 878  
parker.uk@parker.com

**ZA – South Africa,** Kempton Park

Tel: +27 (0)11 961 0700  
parker.southafrica@parker.com

## North America

**CA – Canada,** Milton, Ontario

Tel: +1 905 693 3000

**US – USA,** Cleveland

Tel: +1 216 896 3000

## Asia Pacific

**AU – Australia,** Castle Hill

Tel: +61 (0)2-9634 7777

**CN – China,** Shanghai

Tel: +86 21 2899 5000

**HK – Hong Kong**

Tel: +852 2428 8008

**IN – India,** Mumbai

Tel: +91 22 6513 7081-85

**JP – Japan,** Tokyo

Tel: +81 (0)3 6408 3901

**KR – South Korea,** Seoul

Tel: +82 2 559 0400

**MY – Malaysia,** Shah Alam

Tel: +60 3 7849 0800

**NZ – New Zealand,** Mt Wellington

Tel: +64 9 574 1744

**SG – Singapore**

Tel: +65 6887 6300

**TH – Thailand,** Bangkok

Tel: +662 186 7000-99

**TW – Taiwan,** Taipei

Tel: +886 2 2298 8987

## South America

**AR – Argentina,** Buenos Aires

Tel: +54 3327 44 4129

**BR – Brazil,** Sao Jose dos Campos

Tel: +55 800 727 5374

**CL – Chile,** Santiago

Tel: +56 2 623 1216

**MX – Mexico,** Apodaca

Tel: +52 81 8156 6000



**Parker Hannifin GmbH**

Pat-Parker-Platz 1  
41564 Kaarst (Germany)

Tel.: + 49 (0)2131 4016-0

Fax: + 49 (0)2131 4016-9199

Internet: [www.parker.com](http://www.parker.com)

E-Mail: [parker.germany@parker.com](mailto:parker.germany@parker.com)